

SONY

CATALYST BROWSE

User Manual

Revised Wednesday, October 4, 2023

XDCAM, XDCAM EX, XAVC, XAVC S, NXCAM, SxS and Professional Disc are trademarks of Sony Corporation.

Avid and DNxHD are trademarks or registered trademarks of Avid Technology, Inc. or its subsidiaries in the United States and/or other countries.

All other trademarks or registered trademarks are the property of their respective owners in the United States and other countries and regions. For more information, see <https://www.sonycreativesoftware.com/licensenotices>

Sony Corporation may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from Sony Corporation, the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property.

Sony Creative Software Inc.

1 S.Pinckney St.

Suite 520

Madison, WI 53703

USA

The information contained in this manual is subject to change without notice and does not represent a guarantee or commitment on behalf of Sony Creative Software Inc. in any way. All updates or additional information relating to the contents of this manual will be posted on the Sony Creative Software Inc. Web site, located at <https://www.sonycreativesoftware.com>. The software is provided to you under the terms of the End User License Agreement and Software Privacy Policy, and must be used and/or copied in accordance therewith. Copying or distributing the software except as expressly described in the End User License Agreement is strictly prohibited. No part of this manual may be reproduced or transmitted in any form or for any purpose without the express written consent of Sony Creative Software Inc.

Copyright © 2023. Sony Creative Software Inc.

Program Copyright © 2023. Sony Creative Software Inc. All rights reserved.

Notice to users

Disclaimers

Original images will change in appearance after performing image conversion with this product. Therefore, to prevent copyright infringement on copyrighted material, obtain the proper permissions from the copyright holder of the original images before conversion. IN NO EVENT SHALL SONY CORPORATION BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES, WHETHER BASED ON TORT, CONTRACT, OR OTHERWISE, ARISING OUT OF OR IN CONNECTION WITH THIS MANUAL, THE SOFTWARE OR OTHER INFORMATION CONTAINED HEREIN OR THE USE THEREOF. This software may not be used for purposes other than those specified. Sony Corporation reserves the right to make any modification to this manual or the information contained herein at any time without notice.

Software copyrights

This manual or the software described herein, in whole or in part, may not be reproduced, translated or reduced to any machine-readable form without prior written approval from Sony Creative Software Inc.

© 2023 Sony Creative Software Inc.

HEVC Advance

Covered by one or more claims of the HEVC patents listed at patentlist.accessadvance.com.



Table of Contents

Table of Contents	5
Introduction	7
The Catalyst Browse window	7
Feature comparison	9
Finding media	17
Supported video formats for reading	23
Supported video devices	52
Playing media	55
Previewing video	55
Navigating the timeline	60
Marking in and out points for playback	61
Creating a snapshot of a frame	62
Adjusting and monitoring audio levels	63
Editing clip settings	64
Working with clips	67
Viewing and editing metadata	67
Working with clip lists	69
Working with EDLs	73
Catalog export	74
Combining relay clips	75
Synchronizing multicamera clips	76
Stabilizing clips	76
Lens breathing compensation	81
Repairing flash bands	83

Working with rotated clips	84
Applying color correction	87
Editing Color Adjustments controls	87
Applying color-correction settings	99
Using a Tangent control	101
Video-style (Rec.709) color grading	101
Log (cinematic) color grading	105
Advanced cinematic (ACES) color grading	106
High Dynamic Range (HDR) color grading	107
Exporting color-correction settings	111
Saving and sharing clips	119
Working with FTP devices	119
Editing Catalyst Browse options	135
Keyboard shortcuts	141
Gestures	147
Index	148

Introduction

Catalyst Browse is a powerful clip-management tool for the latest Sony camcorders and decks.

- The Media Browser pane allows you to browse the media files on drives and devices connected to your computer.
- The Video pane allows you to preview media files.
- The Inspector pane allows you to view metadata saved in media files.
- The [Adjust Color workspace](#) allows you to adjust the color content of your clips.
- [Clip lists](#) allow you to assemble clips when working with XDCAM media in an XD root folder , XAVC media in an XD root folder , and RAW media in an AxS folder .



Catalyst Browse is designed to support clips from Sony cameras and devices. For expanded device support, please consider Catalyst Prepare.



Need even more power? Go beyond browsing and viewing to a full-featured media preparation and logging tool with [Catalyst Prepare](#).

Compare the [features](#) of Catalyst Browse and Catalyst Prepare.

What's new in version 2023.2

- Support for video formats has been added.
- New look profiles including Cool, Teal and Orange, Vintage, and Warm have been added.
- Lens breathing compensation is now available for MXF files as well.
- It is now possible to use lens breathing compensation with image stabilization turned off, even when camera settings for lens distortion compensation is turned off.
- A minimum limit for the cropping amount has been implemented to ensure that there are no black borders around the frame when performing image stabilization and lens breathing compensation.

The Catalyst Browse window

The Catalyst Browse window can be displayed in two modes:

- In Media Browser mode, you can use the Media Browser to browse your computer for media files, work with clip lists, and transcode files.
- In View mode, you can preview media, log mark in and out points, and adjust colors.

Click the Media Browser or View button at the top of the Catalyst Browse window to change modes.

Media Browser mode

Mode Selector



View mode



Feature comparison

With [Catalyst Prepare](#), you can go beyond browsing and viewing to a full-featured media preparation and logging tool.

Feature	Catalyst Browse	Catalyst Prepare
		
Format		
XDCAM formats	✓	✓
XAVC Intra	✓	✓
XAVC Long GOP	✓	✓
XAVC Long 422 3840x2160 200 Mbps export		✓
XAVC S Intra and Long 422 10-bit export (MP4)		✓
XAVC Intra 422 10-bit export (MXF)	✓	✓

Feature	Catalyst Browse 	Catalyst Prepare 
XAVC S	✓	✓
X-OCN	✓	✓
Sony RAW	✓	✓
SStP	✓	✓
XAVC HS (read only)	✓	✓
DPX export	✓	✓
DPX read		✓
OpenEXR export	✓	✓
OpenEXR read		✓
DNxHD		✓
ProRes (read only on Windows; read/export on macOS)	✓	✓
H.264	✓	✓
WAV (export only)		✓
MP3 (export only)		✓
Organize		
View/edit clip lists	✓	✓
Storyboard creation		✓
Subclip creation		✓
Organize clips using libraries		✓
Media bins		✓
Create clip catalogs	✓ (3 clips max)	✓
Copy clips with checksum verification		✓
Copy between mark in/out	✓ (MXF/EX)	✓ (Any file)*

Feature	Catalyst Browse 	Catalyst Prepare 
Batch renaming with prefix, numbering, and suffix		✓
Manage audio channels in multichannel audio files		✓
Drag and drop to copy between folders (and bins in Prepare)		✓
Export		
Batch transcode	✓ (if same source settings)	✓
Transcode between in and out points	✓	✓
Export with color settings	✓	✓
Load, save, and delete transcoding presets		✓
Convert SD and HD sources to modern progressive HD and UHD assets		✓
Burn in clip names, timecode, and watermarks		✓
Export storyboard as EDL (Catalyst Edit, Vegas, Final Cut, Premiere)		✓
Map audio channels during export		✓
Transcode using proxy as source clip		✓
Override start timecode during copy/export		✓
Crop aspect ratio during export	✓	✓
Transcode DPX to other formats	✓	✓
Transcode OpenEXR to other formats	✓	✓

Feature	Catalyst Browse 	Catalyst Prepare 
Convert segmented body partitions for XDCAM	✓	✓
Full-volume backup with checksum verification		✓
Upload original clips to Ci	✓	✓
Upload clips to Ci in a transcoded format	✓	✓
Upload clips to Ci with color settings	✓	✓
Upload clips to Ci with burned-in timecode and/or clip name		✓
Upload clips to YouTube		✓
Color Grading		
Global color adjustments	✓	
Per-clip color adjustments		✓
Batch apply color presets and looks to a selection of clips		✓
Sony device color space controls (S-Log & S-Gamut)	✓	✓
Support for reading and rendering HDR color spaces (S-Log3, HLG, and PQ)	✓	✓
Read SR Live settings from clip metadata and use clip settings or manual adjustments to convert between standard- and high-dynamic range content.		✓
SDR gain: convert between standard- and high-dynamic-range content	✓	✓
Automatically apply LUT and EI	✓	✓

Feature	Catalyst Browse 	Catalyst Prepare 
metadata for HDR to SDR conversion		
SDR knee curve: preserve midrange colors and highlights when exporting HDR content to an SDR format or displaying on an SDR display		✓
SDR knee saturation: compensate for decreased saturation around the knee curve when exporting HDR content to an SDR format or displaying on an SDR display		✓
SDR black level: adjust black levels when the working color space is set to Rec.2020/S-Log3 (HDR)		✓
Apply ASC-CDL to a selection of clips		✓
High-quality Sony RAW development	✓	✓
Three-wheel color grading	✓	✓
Curves grading	✓	✓
Import ASC-CDL (.cdl) color correction settings	✓	✓
Export color correction settings as ASC-CDL (.cdl) or 3D LUT (.3dl or .cube)	✓	✓
Tangent device support (Tk/Mf/Kb/Wave)	✓	✓
Other		
Stabilize clips using metadata	✓	✓
Batch encoding in the Stabilize Clip workspace		✓
Compensate for lens breathing using	✓	✓

Feature	Catalyst Browse 	Catalyst Prepare 
metadata		
Manually adjust lens breathing		✓
Support clip rotation metadata	✓	✓
External monitor via Blackmagic Design	✓ (1 device)	✓ (2 devices)
Stitch multiple clips to create a single continuous clip		✓
Anamorphic desqueeze	✓	✓
Flash band correction	✓	✓
Export custom metadata as a sidecar file		✓
Add, delete, or edit essence marks in MXF clips	✓	✓
Read mark in/out points from MXF metadata	✓	✓
Create non-realtime (NRT) metadata for discontinuous timecode and essence marks when creating new NRT metadata during MXF copy	✓	✓
Synchronize mark points between source clip and library		✓
Read and export clips on FTP devices	✓	✓
Fast device-to-device copy between Sony devices via FTP	✓	✓
Copy clips between Sony and non-Sony FTP devices.		✓
Copy growing MXF files via FTP/FTPS from Sony decks		✓
Close growing MXF files generated		✓

Feature	Catalyst Browse 	Catalyst Prepare 
by Sony decks		
Write, rename, and delete clips to SxS media and USB storage via FTP on the PZW-4000	✓	✓
Format USB drives for the Sony PZW-4000 deck		✓
Create the XDROOT folder on USB drives or SxS media		✓
Interoperability with Catalyst Edit		✓
Drag and drop to Catalyst Edit timeline		✓
GPS metadata	✓	✓
GPS metadata map display		✓
Display OK/NG/KEEP metadata flag; sort and filter by flag	✓	✓

*Partial copy in Prepare requires transcode for some formats

Finding media

Media Browser mode allows you to browse the media files on drives and devices connected to your computer.

When you double-click a file in Media Browser view, the file is loaded in View mode, where you can preview it or edit it.

For more information, see ["Playing media" on page 55](#), ["Marking in and out points for playback" on page 61](#), ["Applying color correction" on page 87](#), or ["Viewing and editing metadata" on page 67](#).



Catalyst Browse is designed to support clips from Sony cameras and devices. For expanded device support, please consider Catalyst Prepare.

The Media Browser is not available when Catalyst Browse is started in view-only mode.



An  on a thumbnail indicates that an error was detected with the clip.



A  indicates a clip from an Optical Disc Archive volume.



An  on a thumbnail indicates a clip that contains LUT metadata. For more information, see ["Editing Color Adjustments controls" on page 87](#).



An  on a thumbnail indicates a clip that contains lens breathing metadata. For more information, see ["Lens breathing compensation" on page 81](#).



An  on a thumbnail indicates a clip that contains stabilization metadata. For more information, see ["Stabilizing clips" on page 76](#).



The stabilize icon is not displayed for clips on FTP devices, XDCAM Station volumes via CIFS, XDCAM decks, XDCAM Drive units, or Optical Disc Archive volumes.



An  on a thumbnail indicates a rotated clip. For more information, see ["Working with clips" on page 84](#).



An  on a thumbnail indicates that a clip spans multiple discs on an Optical Disc Archive volume. When you play a clip that spans discs, an indicator is displayed in the timeline to identify the point where the clip switches discs:



An  on a thumbnail indicates a clip that spans multiple files due to file-size limitations but is displayed in Catalyst Browse as a single virtual clip. Spanned XDCAM EX clips can be transcoded directly, but AVCHD clips must be copied first.

To transcode spanned AVCHD clips, first copy them to a new folder. After the copy is complete, the  indicator is removed, and the clips are combined in a new clip that you can transcode. For more information, see ["Saving and sharing clips" on page 119](#) or ["Saving and sharing clips" on page 119](#).



An  on a thumbnail indicates a proxy clip that does not have a full-resolution clip available.

Choosing a folder

Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.

Use the Media Browser to browse your computer for video files.


The top of the Media Browser will display the current folder and its parent folder. You can click the link to the parent folder to navigate up one level.



 To navigate quickly, click the File button  at the bottom of the Media Browser and choose Go to location.

To add the current folder to the Favorite Folders list in the Places pane, click the File button  at the bottom of the Media Browser and choose Add to Favorites.

To remove a folder from the Favorite Folders list, select the folder in the Places pane and click the X button:



Connect to a device via FTP

You can use Catalyst Browse to work with clips on a remote server using FTP/FTPS in much the same way you work with clips on your computer's drives.


For more information, see "[Working with FTP devices](#)" on page 119.

Displaying files in a list or thumbnail mode

Click the button to toggle thumbnail  and list  mode.

In thumbnail mode (), the Media Browser displays thumbnail images and file names.

In list mode (), you can click the headings in the Media Browser to sort the file list by various attributes. Click the heading again to sort in ascending or descending order. An arrow is displayed to indicate the current sorting method:

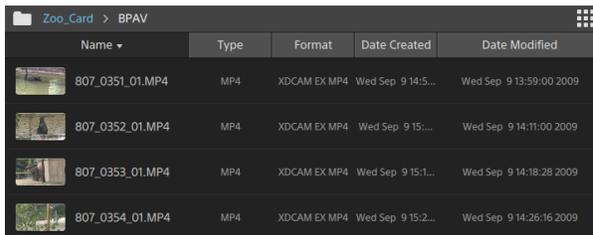

Name	Type	Format	Date Created	Date Modified
 807_0351_01.MP4	MP4	XDCAM EX MP4	Wed Sep 9 14:5...	Wed Sep 9 13:59:00 2009
 807_0352_01.MP4	MP4	XDCAM EX MP4	Wed Sep 9 15:...	Wed Sep 9 14:11:00 2009
 807_0353_01.MP4	MP4	XDCAM EX MP4	Wed Sep 9 15:1...	Wed Sep 9 14:18:28 2009
 807_0354_01.MP4	MP4	XDCAM EX MP4	Wed Sep 9 15:2...	Wed Sep 9 14:26:16 2009

Searching for clips

1. Select the folder you want to search. Subfolders will be included in your search.
2. Click the Search button  to display the Search bar at the top of the Media Browser.
3. Type your search terms in the Search bar. The Media Browser displays all clips in the selected folder that contain your search terms in the file name or Summary metadata.

 Select a clip and click Go to folder  to navigate to a clip's folder.


Click the Close button  to close the Search bar and clear the search results from the Media Browser.

Select a different folder to clear your search terms and start a new search in the selected folder.

Filtering clips

You can use the Filter button  to filter the contents of the Media Browser. You can filter files by file type, file format, date created, or flag metadata.

1. Select the folder you want to view.
2. Click the Filter button  to display the Filter By menu at the top of the Media Browser.

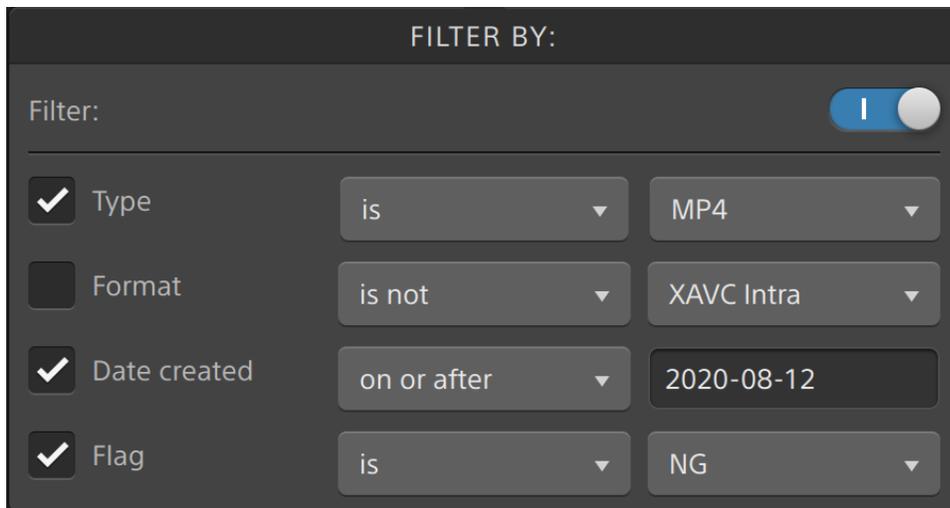

FILTER BY:		
Filter:	<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/> Type	is	MP4
<input type="checkbox"/> Format	is not	XAVC Intra
<input checked="" type="checkbox"/> Date created	on or after	2020-08-12
<input checked="" type="checkbox"/> Flag	is	NG

3. Enable the Filter switch at the top of the menu to enable the filter.
4. Select the check box for each filter you want to apply.

For the Type, Format, and Flag filters, you can choose is or is not to indicate whether files that match the filter should be included or excluded from the Media Browser.

For the Date Created filter, you can choose to display files created on or before a date, on or after a date, or between two dates.

To turn off the filter and display all files in the Media Browser, turn off the Filter switch at the top of the menu.

 Using filtering, you can quickly find and select clips that you had tagged OK during shooting and copy or transcode the filtered clips. For more information, see ["Transcoding clips" on page 126](#) or ["Copying clips" on page 131](#).

Selecting files

- Click a file to select it.
- Hold Shift and click the first and last file you want to select to select a range of files.
- Hold Ctrl (Windows) or Command (macOS) to select multiple files.

 Click the Select button  to select multiple files without using keyboard modifiers.

Copying files

Copying media allows you to import clips from cameras or decks to your computer, to another camera or deck, or to a centralized storage device. For more information, see ["Saving and sharing clips" on page 119](#).

Renaming files

1. Select a file.
2. Click the File button  at the bottom of the Media Browser, choose Rename, and type a new name in the edit box.

 You can also press F2 to rename the selected file.

Renaming is not available for proxy clips or clips that are part of an AVCHD folder structure.

 Renaming is not available when Catalyst Browse is started in view-only mode.

Deleting files

1. Select a file.
2. Click the File button  at the bottom of the Media Browser and choose Delete.

 Deleting files from an AVCHD folder structure is not supported.

 Deleting is not available when Catalyst Browse is started in view-only mode.

Showing source clips

1. Select a file.
2. Click the File button  at the bottom of the Media Browser and choose Show in Finder (macOS) or Show in Explorer (Windows) to view the source clip in its containing folder.

Managing SxS and Professional Disc volumes

If you need to format an SxS card, please use the [Memory Media Utility](#).

If you need to format or finalize an XDCAM Professional Disc volume, please use the [XDCAM Drive Software](#).

Supported video formats for reading

Catalyst Browse supports reading the following video formats from volumes or as independent clips:

XDCAM

SD format

Format	Frame Size	Frame Rate	Field Order	Video Codec	Bit Rate	Audio Channels
DV	720x480	59.94i	Lower	DV	25 CBR	4x16 bit
DV	720x576	50i	Lower	DV	25 CBR	4x16 bit
MPEG IMX	720x512	59.94i	Upper	MPEG-2 Intra	30, 40, 50 CBR	4x24 bit / 8x16 bit
MPEG IMX	720x608	50i	Upper	MPEG-2 Intra	30, 40, 50 CBR	4x24 bit / 8x16 bit

Format	Frame Size	Frame Rate	Field Order	Video Codec	Bit Rate	Audio Channels
Uncompressed	720x486	59.94i	Upper	Uncompressed	90 CBR	4x24 bit / 8x16 bit
Uncompressed	720x576	50i	Upper	Uncompressed	90 CBR	4x24 bit / 8x16 bit

HD format

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Video Codec	Bit Rate
MPEG HD	1280x720	1.0	50p, 59.94p	MPEG-2 Long GOP	25 CBR
MPEG HD	1280x720	1.0	50p, 59.94p	MPEG-2 Long GOP	35 VBR
MPEG HD	1280x720	1.0	50p, 59.94p	MPEG-2 Long GOP	50 CBR
MPEG HD	1440x1080	1.333	23.976p, 25p, 29.97p, 50i, 59.94i	MPEG-2 Long GOP	17.5 CBR
MPEG HD	1440x1080	1.333	23.976p, 25p, 29.97p, 50i, 59.94i	MPEG-2 Long GOP	25 CBR
MPEG HD	1440x1080	1.333	23.976p, 25p, 29.97p, 50i, 59.94i	MPEG-2 Long GOP	35 CBR
MPEG HD	1440x540	0.667	23.976p, 25p, 29.97p, Over Crank	MPEG-2 Long GOP	8.75 CBR
MPEG HD	1440x540	0.667	23.976p, 25p, 29.97p, Over Crank	MPEG-2 Long GOP	12.5 CBR
MPEG HD	1440x540	0.667	23.976p, 25p, 29.97p, Over Crank	MPEG-2 Long GOP	17.5 CBR
MPEG HD422	1920x1080	1.0	23.976p, 25p, 29.97p, 50i, 59.94i	MPEG-2 Long GOP	35 CBR, 50 CBR
MPEG HD422	1920x540	0.5	23.976p, 25p, 29.97p, Over Crank	MPEG-2 Long GOP	25 CBR

XDCAM EX

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Field Order	Video Codec	Audio Codec	Bit Rate
DV	720x480	0.9091	59.94p	Lower	DV	PCM, 48 kHz, 16 bit	25 CBR
DV	720x576	1.0926	50i	Lower	DV	PCM, 48 kHz, 16 bit	25 CBR
MPEG HD (EX-HQ)	1280x720	1.0	23.976p, 25p, 29.97p, 50p, 59.94p		MPEG-2 Long GOP	PCM, 48 kHz, 16 bit	35 VBR
MPEG HD (EX-SP)	1440x1080	1.333	50i, 59.94i		MPEG-2 Long GOP	PCM, 48 kHz, 16 bit	25 CBR
MPEG HD (EX-HQ)	1440x1080	1.333	23.976p, 25p, 29.97p, 50i, 59.94i		MPEG-2 Long GOP	PCM, 48 kHz, 16 bit	35 VBR
MPEG HD422 (EX-HQ)	1920x1080	1.0	23.976p, 25p, 29.97p, 50i, 59.94i		MPEG-2 Long GOP	PCM, 48 kHz, 16 bit	35 VBR

XAVC Intra

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Video Codec	Audio Channels (PCM, 48 kHz, 24 bit)	Bit Rate
XAVC Intra	1440x1080	1.333	50i, 59.94i, 23.976p, 25p, 29.97p	MPEG-4 AVC Intra	8	CBG 50
XAVC Intra	1920x1080	1.0	50i, 59.94i, 23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Intra	8, 16	CBG 100
XAVC Intra	1920x1080	1.0	50i, 59.94i, 23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Intra	8	CBG 200
XAVC Intra HFR	1920x1080	1.0	50p, 50i, 59.94p, 59.94i	MPEG-4 AVC Intra	0	CBG 100
XAVC Intra	2048x1080	1.0	23.976p, 24p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Intra	8	VBR
XAVC Intra	2048x1080	1.0	23.976p, 24p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Intra	8, 16	CBG 100
XAVC Intra	3840x2160	1.0	23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Intra	8	VBR
XAVC Intra	3840x2160	1.0	23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Intra	8, 16	CBG 300
XAVC Intra	4096x2160	1.0	23.976p, 24p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Intra	8	VBR
XAVC Intra	4096x2160	1.0	23.976p, 24p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Intra	8, 16	CBG 300

XAVC Long-GOP

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Video Codec	Audio	Bit Rate
XAVC Long	1280x720	1.0	50p, 59.94p	MPEG-4 AVC Long, High 422 Profile	4-channel PCM, 48 kHz, 24 bit	80 (Maximum)
XAVC Long	1920x1080	1.0	23.976p, 25p, 29.97p, 50p, 50i, 59.94p, 59.94i	MPEG-4 AVC Long, High 422 Profile	4-channel PCM, 48 kHz, 24 bit	80 (Maximum)
XAVC Long	3840x2160	1.0	23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Long, High Profile	4-channel PCM, 48 kHz, 24 bit	200 (Maximum)
XAVC Long Proxy	480x270	1.0	23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Long, High Profile	MPEG-4 AAC, 2 channels, 48 kHz, 256 kbps MPEG-4 AAC, 6 (5.1) channels, 48 kHz, 640 kbps	1 or .5 Mbps
XAVC Long Proxy	640x360	1.0	23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Long, High Profile	MPEG-4 AAC, 2 channels, 48 kHz, 256 kbps	3 Mbps

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Video Codec	Audio	Bit Rate
					MPEG-4 AAC, 6 (5.1) channels, 48 kHz, 640 kbps	
XAVC Long Proxy	1280x720	1.0	23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Long, High Profile	MPEG-4 AAC, 2 channels, 48 kHz, 256 kbps	9 Mbps
					MPEG-4 AAC, 6 (5.1) channels, 48 kHz, 640 kbps	

XAVC S

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Video Codec	Audio	Bit Rate
XAVC Long Proxy	480x270	1.0	23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Long, High Profile	MPEG-4 AAC, 2 channels, 48 kHz, 256 kbps	4
XAVC Long Proxy	640x360	1.0	23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Long, High Profile	MPEG-4 AAC, 2 channels, 48 kHz, 256 kbps	10
XAVC Long	1280x720	1.0	23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Long, Main Profile or High Profile	2-channel PCM, 48 kHz, 16 bit 4-channel PCM, 48 kHz, 24 bit	40
XAVC Long Proxy	1280x720	1.0	23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Long, High Profile	MPEG-4 AAC, 2 channels, 48 kHz, 256 kbps	16
XAVC Long	1280x720	1.0	100p, 119.88p	MPEG-4 AVC Long, Main Profile or High Profile	2-channel PCM, 48 kHz, 16 bit 4-channel PCM, 48 kHz, 24 bit	80
XAVC Long	1440x1080	1.0	23.976p, 25p, 29.97p, 50p	MPEG-4 AVC Long, Main Profile or High Profile	2-channel PCM, 48 kHz, 16 bit 4-channel	80

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Video Codec	Audio	Bit Rate
			59.94p		PCM, 48 kHz, 24 bit	
XAVC Long	1920x1080	1.0	23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Long, Main Profile or High Profile	2-channel PCM, 48 kHz, 16 bit 2/4-channel PCM, 48 kHz, 24 bit	80
XAVC Long	1920x1080	1.0	100p, 119.88p	MPEG-4 AVC Long, Main Profile or High Profile	2-channel PCM, 48 kHz, 16 bit 2/4-channel PCM, 48 kHz, 24 bit	150
XAVC Long Proxy	1920x1080	1.0	23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Long, High Profile	MPEG-4 AAC, 2 channels, 48 kHz, 256 kbps	25
XAVC Long	1920x1080	1.0	25p, 30p	AVC S Long 4:2:0 8-bit MP4	MPEG-4 AAC, 2 channels, 48 kHz, 256 kbps	16 50
XAVC Long	1920x1080	1.0	50p, 60p	AVC S Long 4:2:0 8-bit MP4	MPEG-4 AAC, 2 channels, 48 kHz, 256 kbps	25 50
XAVC Long	1920x1080	1.0	24p	AVC S Long 4:2:0 8 bit-MP4	MPEG-4 AAC, 2 channels,	50

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Video Codec	Audio	Bit Rate
					48 kHz, 256 kbps	
XAVC Long	1920x1080	1.0	100p, 120p	AVC S Long 4:2:0 8 bit-MP4	MPEG-4 AAC, 2 channels, 48 kHz, 256 kbps	60 100
XAVC Long	1920x1080	1.0	24p, 25p, 30p,50p, 60p	XAVC S Long 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit 2/4- channel PCM, 48 kHz, 24 bit	50
XAVC Intra	1920x1080	1.0	24p	XAVC S Intra 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit 2/4- channel PCM, 48 kHz, 24 bit	89
XAVC Intra	1920x1080	1.0	25p	XAVC S Intra 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit 2/4- channel PCM, 48 kHz, 24 bit	93
XAVC Intra	1920x1080	1.0	30p	XAVC S Intra 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit 2/4- channel	111

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Video Codec	Audio	Bit Rate
					PCM, 48 kHz, 24 bit	
XAVC Intra	1920x1080	1.0	50p	XAVC S Intra 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit 2/4-channel PCM, 48 kHz, 24 bit	185
XAVC Intra	1920x1080	1.0	60p	XAVC S Intra 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit 2/4-channel PCM, 48 kHz, 24 bit	222
XAVC Long	3840x2160	1.0	23.976p, 25p, 29.97p	MPEG-4 AVC Long, Main Profile or High Profile	2-channel PCM, 48 kHz, 16 bit 2/4-channel PCM, 48 kHz, 24 bit	188
XAVC Long	3840x2160	1.0	50p, 59.94p	MPEG-4 AVC Long, Main Profile or High Profile	2-channel PCM, 48 kHz, 16 bit 2/4-channel PCM, 48 kHz, 24 bit	200
XAVC Long	3840x2160	1.0	100p, 119.88p	MPEG-4 AVC Long, Main Profile or High Profile	2-channel PCM, 48 kHz, 16 bit	200

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Video Codec	Audio	Bit Rate
				Profile	2/4-channel PCM, 48 kHz, 24 bit	
XAVC Long	3840x2160	1.0	24p, 25p, 30p	XAVC S Long 4:2:0 8-bit MP4	2-channel PCM, 48 kHz, 16 bit	60 100
					2/4-channel PCM, 48 kHz, 24 bit	
XAVC Long	3840x2160	1.0	50p, 60p	XAVC S Long 4:2:0 8-bit MP4	2-channel PCM, 48 kHz, 16 bit	150
					2/4-channel PCM, 48 kHz, 24 bit	
XAVC Long	3840x2160	1.0	100p, 120p	XAVC S Long 4:2:0 8-bit MP4	2-channel PCM, 48 kHz, 16 bit	200
					2/4-channel PCM, 48 kHz, 24 bit	
XAVC Long	3840x2160	1.0	24p	XAVC S Long 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit	100
					2/4-channel PCM, 48 kHz, 24 bit	
XAVC Long	3840x2160	1.0	25p, 30p	XAVC S Long	2-channel	140

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Video Codec	Audio	Bit Rate
				4:2:2 10-bit MP4	PCM, 48 kHz, 16 bit 2/4- channel PCM, 48 kHz, 24 bit	
XAVC Long	3840x2160	1.0	50p, 60p	XAVC S Long 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit 2/4- channel PCM, 48 kHz, 24 bit	200
XAVC Long	3840x2160	1.0	100p, 120p	XAVC S Long 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit 2/4- channel PCM, 48 kHz, 24 bit	280
XAVC Long	3840x2160	1.0	24p	XAVC S Long 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit 2/4- channel PCM, 48 kHz, 24 bit	100
XAVC Intra	3840x2160	1.0	24p	XAVC S Intra 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit 2/4- channel PCM, 48	240

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Video Codec	Audio	Bit Rate
					kHz, 24 bit	
XAVC Intra	3840x2160	1.0	25p	XAVC S Intra 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit 2/4- channel PCM, 48 kHz, 24 bit	250
XAVC Intra	3840x2160	1.0	30p	XAVC S Intra 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit 2/4- channel PCM, 48 kHz, 24 bit	300
XAVC Intra	3840x2160	1.0	50p	XAVC S Intra 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit 2/4- channel PCM, 48 kHz, 24 bit	500
XAVC Intra	3840x2160	1.0	60p	XAVC S Intra 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit 2/4- channel PCM, 48 kHz, 24 bit	600
XAVC Intra	4096x2160	1.0	24p	XAVC S Intra 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit	230

XAVC HS

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Video Codec	Audio	Bit Rate
HEVC Proxy	1920x1080	1.0	23.976p, 30p, 50p, 59.94, 100p, 119,98p	HEVC Long, 10-bit, 4:2:0	2-channel PCM, 48 kHz, 16 bit or 24 bit	16
HEVC	3840x2160	1.0	23.976p	HEVC Long, 10-bit, 4:2:0	2/4-channel PCM, 48 kHz, 16 bit or 24 bit	30
HEVC	3840x2160	1.0	50p	HEVC Long, 10-bit, 4:2:0	2/4-channel PCM, 48 kHz, 16 bit or 24 bit	45
HEVC	3840x2160	1.0	59.94p	HEVC Long, 10-bit, 4:2:0	2/4-channel PCM, 48 kHz, 16 bit or 24 bit	78
HEVC	3840x2160	1.0	100p	HEVC Long, 10-bit, 4:2:0	2/4-channel PCM, 48 kHz, 16 bit or 24 bit	200
HEVC	3840x2160	1.0	119.88p	HEVC Long, 10-bit, 4:2:0	2/4-channel PCM, 48 kHz, 16 bit or 24 bit	200
HEVC	3840x2160	1.0	23.976p	HEVC Long, 10-bit, 4:2:2	2/4-channel PCM, 48 kHz, 16 bit or 24 bit	60
HEVC	3840x2160	1.0	50p	HEVC Long, 10-bit, 4:2:2	2/4-channel PCM, 48 kHz, 16 bit or 24 bit	200
HEVC	3840x2160	1.0	59.94p	HEVC Long, 10-bit, 4:2:2	2/4-channel PCM, 48 kHz, 16 bit or 24 bit	100
HEVC	3840x2160	1.0	100p	HEVC Long, 10-bit, 4:2:2	2/4-channel PCM, 48 kHz, 16 bit or 24 bit	280
HEVC	3840x2160	1.0	119.88p	HEVC	2/4-channel	280

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Video Codec	Audio	Bit Rate
				Long, 10-bit, 4:2:2	PCM, 48 kHz, 16 bit or 24 bit	
HEVC	3840x2160	1.0	24p	XAVC	2-channel	30
				HS Long	PCM, 48 kHz, 16 bit	50
				4:2:0 10-bit MP4	2/4-channel	100
					PCM, 48 kHz, 24 bit	
HEVC	3840x2160	1.0	50p, 60p	XAVC	2-channel	45
				HS Long	PCM, 48 kHz, 16 bit	75
				4:2:0 10-bit MP4	2/4-channel	150
					PCM, 48 kHz, 24 bit	
HEVC	3840x2160	1.0	100p, 120p	XAVC	2-channel	200
				HS Long	PCM, 48 kHz, 16 bit	
				4:2:0 10-bit MP4	2/4-channel	
					PCM, 48 kHz, 24 bit	
HEVC	3840x2160	1.0	24p	XAVC	2-channel	50
				HS Long	PCM, 48 kHz, 16 bit	100
				4:2:2 10-bit MP4	2/4-channel	
					PCM, 48 kHz, 24 bit	
HEVC	3840x2160	1.0	50p, 60p	XAVC	2-channel	100
				HS Long	PCM, 48 kHz, 16 bit	200
				4:2:2 10-bit MP4	2/4-channel	
					PCM, 48 kHz, 24 bit	

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Video Codec	Audio	Bit Rate
HEVC	3840x2160	1.0	100p, 120p	XAVC HS Long 4:2:2 10-bit MP4	2-channel PCM, 48 kHz, 16 bit 2/4-channel PCM, 48 kHz, 24 bit	280
HEVC	7680x4320	1.0	23.976p, 25p, 29.97p	HEVC Long, 10-bit, 4:2:0	2/4-channel PCM, 48 kHz, 16 bit or 24 bit	204
HEVC	7680x4320	1.0	23.976p, 25p, 29.97p	HEVC Long, 10-bit, 4:2:2	2/4-channel PCM, 48 kHz, 16 bit or 24 bit	260, 520

XAVC H

Format	Frame Size	Bits	Frame Rate	Quality
HEVC Long	7680x4320	10	23.976p, 25p, 29.97p	520 Mbs
HEVC Intra	7680x4320	10	23.976p, 25p, 29.97p	SQ, HQ
HEVC Intra	8192x4320	10	23.976p, 24p, 25p, 29.97p	SQ, HQ

XAVC Proxy

Format	Frame Size	Frame Rate	Video Codec	Audio	Bit Rate
XAVC Proxy	480x270	23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Long, Main Profile	MPEG-4 AAC, 2 channels, 48 kHz, 256 kbps	4
XAVC Proxy	640x360	23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Long, Main Profile	MPEG-4 AAC, 2 channels, 48 kHz, 256 kbps	10
XAVC Proxy	720x480	59.94i	MPEG-4 AVC Long, Main Profile	MPEG-4 AAC, 2 channels, 48 kHz, 256 kbps	10
XAVC Proxy	720x576	50i	MPEG-4 AVC Long, Main Profile	MPEG-4 AAC, 2 channels, 48 kHz, 256 kbps	10
XAVC Proxy	1280x720	23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Long, Main Profile or High Profile	MPEG-4 AAC, 2 channels, 48 kHz, 256 kbps	28
XAVC Proxy	1920x1080	50i, 59.94i, 23.976p, 25p, 29.97p, 50p, 59.94p	MPEG-4 AVC Long, Main Profile or High Profile	MPEG-4 AAC, 2 channels, 48 kHz, 256 kbps	28

X-OCN

Format	Frame Size	Bits	Frame Rate	Quality
X-OCN	2048x1080	16	23.976p, 24p, 25p, 29.97p, 50p, 59.94p, HFR (max. 240)	LT, ST, XT
X-OCN	3840x2160	16	23.976p, 24p, 25p, 29.97p, 50p, 59.94p, HFR (max. 120p)	LT, ST, XT
X-OCN	4096x1716	16	23.976p, 24p, 25p, 29.97p	LT, ST, XT
X-OCN	4096x2160	16	23.976p, 24p, 25p, 29.97p, 50p, 59.94p, HFR (max. 120p)	LT, ST, XT

Format	Frame Size	Bits	Frame Rate	Quality
X-OCN	4096x3024	16	23.976p, 24p, 25p, 29.97p,	LT, ST, XT
X-OCN	4096x3432	16	23.976p, 24p, 25p, 29.97p	LT, ST, XT
X-OCN	6048x2534	16	23.976p, 24p, 25p, 29.97p	LT, ST, XT
X-OCN	6054x3192	16	23.976p, 24p, 25p, 29.97p	LT, ST, XT
X-OCN	5674x3192	16	23.976p, 24p, 25p, 29.97p	LT, ST, XT
X-OCN	5760x3036	16	23.976p, 24p, 25p, 29.97p, 50p, 59.94p	LT
X-OCN	5760x3240	16	23.976p, 25p, 29.97p, 50p, 59.94p	LT
X-OCN	6052x3192	16	23.976p, 24p, 25p, 29.97p, 50p, 59.94p	LT
X-OCN	6052x3404	16	23.976p, 25p, 29.97p, 50p, 59.94p	LT
X-OCN	6054x3272	16	23.976p, 24p, 25p, 29.97p	LT, ST, XT
X-OCN	6048x4032	16	23.976p, 24p, 25p	LT, ST, XT
X-OCN	8632x4552	16	23.976p, 24p, 25p, 29.97p	LT
X-OCN	8632x4856	16	23.976p, 25p, 29.97p	LT

RAW

Format	Frame Size	Bits	Frame Rate	Compression
F5/F55RAW	2048x1080	16	23.976p, 24p, 25p, 29.97p, 50p, 59.94p, HFR (max. 240)	SQ
F5/F55RAW	3840x2160	16	23.976p, 24p, 25p, 29.97p, 50p, 59.94p, HFR (max. 120p)	SQ
F5/F55RAW	4096x2160	16	23.976p, 24p, 25p, 29.97p, 50p, 59.94p, HFR (max. 120p)	SQ
F65RAW	4096x2160	16	23.976p, 24p, 25p, 29.97p, 50p, 59.94p, HFR (max. 120)	Lite, SQ
FS700RAW	2048x1080	16	23.976p, 25p, 29.97p, 50p, 59.94p,	SQ

Format	Frame Size	Bits	Frame Rate	Compression
HFR (max. 240)				
FS700RAW	4096x2160	16	23.976p, 25p, 29.97p, 50p, 59.94p, HFR (max. 120)	SQ

HDCAM SR (SStP)

Format	Frame Size	Bits	Color Space	Pixel Aspect Ratio	Frame Rate	Compression (Mbps)
SSTP	1280x720	10	YUV 422	1.0	50p, 59.94p	Lite(220), SQ (440)
SSTP	1920x1080	10	YUV 422	1.0	50i, 59.94i, 23.976p, 24p, 25p, 29.97p, 50p, 59.94p	Lite(220), SQ (440)
SSTP	1920x1080	10	RGB 444	1.0	50i, 59.94i, 23.976p, 24p, 25p, 29.97p, 50p, 59.94p	SQ(440), HQ (880)
SSTP	1920x1080	12	RGB 444	1.0	50i, 59.94i, 23.976p, 24p, 25p, 29.97p, 50p, 59.94p	HQ(880)
SSTP	2048x1080	10	YUV 422	1.0	50p, 59.94p	Lite(220), SQ (440)
SSTP	2048x1080	10	RGB 444	1.0	50i, 59.94i, 23.976p, 24p, 25p, 29.97p	SQ(440)
SSTP	2048x1080	10	RGB 444	1.0	23.976p, 24p, 25p, 29.97p	HQ(880)
SSTP	2048x1080	12	RGB 444	1.0	50i, 59.94i, 23.976p, 24p, 25p, 29.97p	SQ(440)
SSTP	2048x1080	12	RGB 444	1.0	23.976p, 24p, 25p, 29.97p, 50p,	HQ(880)

Format	Frame Size	Bits	Color Space	Pixel Aspect Ratio	Frame Rate	Compression (Mbps)
					59.94p	
SSTP	2048x1080	12	RGB 444	1.0	23.976p, 24p, 25p, 29.97p	SQ(440)
SSTP	2048x1080	12	RGB 444	1.0	23.976p, 24p, 25p, 29.97p, 50p, 59.94p	HQ(880)
SSTP	2048x1556	10	RGB 444	1.0	23.976p, 24p, 25p	HQ(880)

NXCAM

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Video Codec	Audio Codec	Bit Rate
AVCHD	1920x1080	1.0	59.94p, 50p,	H.264/MPEG-4 AVC	Dolby AC-3 or PCM 2 channels, 48 kHz, 16 bit	28 Mbps
AVCHD	1920x1080	1.0	59.94i, 50i, 29.97p, 25p, 23.976p	H.264/MPEG-4 AVC	Dolby AC-3 or PCM 2 channels, 48 kHz, 16 bit	24 or 17 Mbps
AVCHD	1280x720	1.0	59.94p, 50p	H.264/MPEG-4 AVC	Dolby AC-3 or PCM 2 channels, 48 kHz, 16 bit	24 or 17 Mbps
AVCHD	1440x1080	1.333	59.94i, 50i	H.264/MPEG-4 AVC	Dolby AC-3 or PCM 2 channels, 48 kHz, 16 bit	9 or 5 Mbps
MPEG-2 SD	720x480	0.9091 or 1.2121	23.976p, 29.97p, 59.94i	MPEG-2	Dolby AC-3 2 channels, 48 kHz, 16 bit	9 Mbps
MPEG-2 SD	720x576	1.0926 or 1.4568	25p, 50i	MPEG-2	Dolby AC-3 2 channels, 48 kHz, 16 bit	9 Mbps

AVC H.264/MPEG-4

Format	Frame Size	Screen Aspect Ratio	Frame Rate	Video Codec	Audio Codec	Bit Rate
H.264/MPEG-4 AVC	1280x720	16:9	50p, 100p, 120p,	AVC, 8-bit, 4:2:0	Mono, 48kHz, AAC compression w/ AGC	
H.264/MPEG-4 AVC	1920x1080	16:9	24p, 25p, 30p, 48p, 50p, 60p	AVC, 8-bit, 4:2:0	Mono, 48kHz, AAC compression w/ AGC	
H.264/MPEG-4 AVC	1920x1440	4:3	24p, 25p, 30p, 48p	AVC, 8-bit, 4:2:0	Mono, 48kHz, AAC compression w/ AGC	
H.264/MPEG-4 AVC	3840x2160	16:9	23.97p, 24p, 25p, 29.97p, 50p, 59.94p	AVC, 8-bit, 4:2:0	Mono, 48kHz, AAC compression w/ AGC	
H.264/MPEG-4 AVC	4096x2160	17:9	12p	AVC, 8-bit, 4:2:0	Mono, 48kHz, AAC compression w/ AGC	
H.264/MPEG-4 AVC	2704x1524	16:9	25p, 30p	AVC, 8-bit, 4:2:0	Mono, 48kHz, AAC compression w/ AGC	
H.264/MPEG-4 AVC	2704x1440	17:9	24p	AVC, 8-bit, 4:2:0	Mono, 48kHz, AAC compression w/ AGC	
H.264/MPEG-4 AVC	1280x960	4:3	48p, 100p	AVC, 8-bit, 4:2:0	Mono, 48kHz, AAC compression w/ AGC	

Format	Frame Size	Screen Aspect Ratio	Frame Rate	Video Codec	Audio Codec	Bit Rate
H.264/MPEG-4 AVC	848x480	16:9	240p	AVC, 8-bit, 4:2:0	Mono, 48kHz, AAC compression w/ AGC	
H.264/MPEG-4 AVC	640x480	4:3	25p, 30p	AVC, 8-bit, 4:2:0	Mono, 48kHz, AAC compression w/ AGC	
H.264/MPEG-4 AVC	240x180		25p, 29.97p	AVC, 8-bit, 4:2:0	2 channels, 16 bit, AAC compression w/ AGC	
H.264/MPEG-4 AVC	320x180		25p, 29.97p	AVC, 8-bit, 4:2:0	2 channels, 16 bit, AAC compression w/ AGC	
H.264/MPEG-4 AVC	320x240		25p, 29.97p	AVC, 8-bit, 4:2:0	2 channels, 16 bit, AAC compression w/ AGC	
H.264/MPEG-4 AVC	480x270		25p, 29.97p	AVC, 8-bit, 4:2:0	2 channels, 16 bit, AAC compression w/ AGC	
H.264/MPEG-4 AVC	640x480		25p, 29.97p	AVC, 8-bit, 4:2:0	2 channels, 16 bit, AAC compression w/ AGC	
H.264/MPEG-4 AVC	1280x720		50p, 60p, 100p, 120p	AVC, 8-bit, 4:2:0	2 channels, 16 bit, AAC compression w/ AGC	
H.264/MPEG-4 AVC	1280x960		48p, 100p, 120p	AVC, 8-bit,	2 channels, 16 bit, AAC	

Format	Frame Size	Screen Aspect Ratio	Frame Rate	Video Codec	Audio Codec	Bit Rate
				4:2:0	compression w/ AGC	
H.264/MPEG-4 AVC	1920x1080		24p, 25p, 29.97p, 48p, 50p, 60p	AVC, 8-bit, 4:2:0	2 channels, 16 bit, AAC compression w/ AGC	
H.264/MPEG-4 AVC	1920x1440		24p, 25p, 29.97p, 48p	AVC, 8-bit, 4:2:0	2 channels, 16 bit, AAC compression w/ AGC	
H.264/MPEG-4 AVC	2704x1524		24p, 25p, 29.97p	AVC, 8-bit, 4:2:0	2 channels, 16 bit, AAC compression w/ AGC	
H.264/MPEG-4 AVC	3840x2160		23.97p, 24p, 25p, 29.97p, 50p, 59.94p	AVC, 8-bit, 4:2:0	2 channels, 16 bit, AAC compression w/ AGC	
H.264/MPEG-4 AVC	4096x2160		12p	AVC, 8-bit, 4:2:0	2 channels, 16 bit, AAC compression w/ AGC	
H.264/MPEG-4 AVC (HVO)	720x480		59.94i	AVC, 8-bit, 4:2:0	2 channels, 16 bit, AAC compression w/ AGC	
H.264/MPEG-4 AVC (HVO)	720x576		50i	AVC, 8-bit, 4:2:0	2 channels, 16 bit, AAC compression w/ AGC	

AS-11 DPP MXF

Format	Frame Size	Frame Rate	Video Codec	Audio Codec	Bit Rate
IMX-50	720x576	25	MPEG-2 Intra	PCM, 48 kHz, 24 bit	
XAVC Intra	1920x1080	25	MPEG-4 AVC Intra	PCM, 48 kHz, 24 bit	

Avid DNxHD®

Container: MXF

Audio Codec: PCM 44.1 kHz or 48 kHz, 16 bit or 24 bit

Frame Size	Family Name	Color Space/Bits	Frame Rate/Maximum Bit Rate
1920x1080	Avid DNxHD® 444	4:4:4 10 bit	29.97p @ 440 Mbps, 25p @ 365 Mbps, 24p @ 350 Mbps, 23.976p @ 350 Mbps
1920x1080	Avid DNxHD® 220x	4:2:2 10 bit	60p @ 440 Mbps, 59.94p @ 440 Mbps, 50p @ 365 Mbps, 59.94i @ 220 Mbps, 50i @ 185 Mbps, 29.97p @ 220 Mbps, 25p @ 185 Mbps, 24p @ 175 Mbps, 23.976p @ 175 Mbps
1920x1080	Avid DNxHD® 220	4:2:2 8 bit	60p @ 440 Mbps, 59.94p @ 440 Mbps, 50p @ 365 Mbps, 59.94i @ 220 Mbps, 50i @ 185 Mbps, 29.97p @ 220 Mbps, 25p @ 185 Mbps, 24p @ 175 Mbps, 23.976p @ 175 Mbps
1920x1080	Avid DNxHD® 145	4:2:2 8 bit	60p @ 290 Mbps, 59.94p @ 290 Mbps, 50p @ 240 Mbps, 59.94i @ 145 Mbps, 50i @ 120 Mbps, 29.97p @ 145 Mbps, 25p @ 120 Mbps, 24p @ 115 Mbps, 23.976p @ 115 Mbps
1920x1080	Avid DNxHD® 145 (subsampled to 1440x1080)	4:2:2 8 bit	59.94i @ 145 Mbps, 50i @ 120 Mbps
1920x1080	Avid DNxHD® 100 (subsampled to 1440x1080)	4:2:2 8 bit	59.94i @ 100 Mbps, 50i @ 85 Mbps, 29.97p @ 100 Mbps, 25p @ 85 Mbps, 24p @ 80 Mbps, 23.976p @ 80 Mbps
1920x1080	Avid DNxHD® 36	4:2:2 8 bit	60p @ 90 Mbps, 59.94p @ 90 Mbps, 50p @ 75 Mbps, 29.97p @ 45 Mbps, 25p @ 36 Mbps, 24p @ 36 Mbps, 23.976p @ 36 Mbps
1280x720	Avid DNxHD® 220x	4:2:2 10 bit	59.94p @ 220 Mbps, 50p @ 175 Mbps, 29.97p @ 110 Mbps, 25p @ 90 Mbps, 23.976p @ 90 Mbps
1280x720	Avid DNxHD®	4:2:2 8 bit	59.94p @ 220 Mbps, 50p @ 175 Mbps,

Frame Size	Family Name	Color Space/Bits	Frame Rate/Maximum Bit Rate
	220		29.97p @ 110 Mbps, 25p @ 90 Mbps, 23.976p @ 90 Mbps
1280x720	Avid DNxHD® 145	4:2:2 8 bit	59.94p @ 145 Mbps, 50p @ 115 Mbps, 29.97p @ 75 Mbps, 25p @ 60 Mbps, 23.976p @ 60 Mbps
1280x720	Avid DNxHD® 100 (subsampled to 960x720)	4:2:2 8 bit	59.94p @ 100 Mbps, 50p @ 85 Mbps, 29.97p @ 50 Mbps, 25p @ 45 Mbps, 23.976p @ 50 Mbps

Apple ProRes

Container: MOV

Audio Codec: PCM

Format	Frame Size	Frame Rate	Video Codec
ProRes	720x486	59.94i, 30p, 29.97p, 24p, 23.976p	422 (proxy), 422 (LT), 422, 422 (HQ), 4444, 4444 XQ (Windows only)
ProRes	720x576	50i, 25p	422 (proxy), 422 (LT), 422, 422 (HQ), 4444, 4444 XQ (Windows only)
ProRes	960x720	60p, 59.94p, 50p, 30p, 29.97p, 24p, 23.976p	422 (proxy), 422 (LT), 422, 422 (HQ), 4444, 4444 XQ (Windows only)
ProRes	1280x720	60p, 59.94p, 50p, 30p, 29.97p, 24p, 23.976p	422 (proxy), 422 (LT), 422, 422 (HQ), 4444, 4444 XQ (Windows only)
ProRes	1280x1080	59.94i, 30p, 29.97p, 24p, 23.976p	422 (proxy), 422 (LT), 422, 422 (HQ), 4444, 4444 XQ (Windows only)
ProRes	1440x1080	59.94i, 50i, 30p, 29.97p, 25p, 24p, 23.976p	422 (proxy), 422 (LT), 422, 422 (HQ), 4444, 4444 XQ (Windows only)
ProRes	1920x1080	60p, 59.94p, 50p, 59.94i, 50i, 30p, 29.97p, 25p, 24p, 23.976p	422 (proxy), 422 (LT), 422, 422 (HQ), 4444, 4444 XQ (Windows only)
ProRes	2048x1080	60p, 59.94p, 50p, 30p, 29.97p, 25p, 24p, 23.976p	422 (proxy), 422 (LT), 422, 422 (HQ), 4444, 4444 XQ (Windows only)
ProRes	2048x1556	60p, 59.94p, 50p, 30p, 29.97p, 25p, 24p, 23.976p	422 (proxy), 422 (LT), 422, 422 (HQ), 4444, 4444 XQ (Windows only)
ProRes	3840x2160	60p, 59.94p, 50p, 30p, 29.97p, 25p, 24p, 23.976p	422 (proxy), 422 (LT), 422, 422 (HQ), 4444, 4444 XQ (Windows only)

Format	Frame Size	Frame Rate	Video Codec
ProRes	4096x2160	60p, 59.94p, 50p, 30p, 29.97p, 25p, 24p, 23.976p	422 (proxy), 422 (LT), 422, 422 (HQ), 4444, 4444 XQ (Windows only)
ProRes	5120x2160	60p, 59.94p, 50p, 30p, 29.97p, 25p, 24p, 23.976p	422 (proxy), 422 (LT), 422, 422 (HQ), 4444 , 4444 XQ (Windows only)

HDV

Container: MPEG-2 Transport Stream (Windows), MOV (macOS)

Audio Codec: MPEG-1 Audio Layer-2 (Windows). 2 channels, 48 kHz, 16 bit

Format	Frame Size	Pixel Aspect Ratio	Frame Rate	Interlace	Video Codec
HDV	1440x1080	1.333	50i, 59.94i	Upper	MPEG-2 MP@H14

DV

Container: AVI (Windows), MOV (macOS)

Audio Codec: PCM, 2 channels, 32 kHz, 16 bit

Format	Frame Size	Frame Rate	Field Order	Video Codec	Bit Rate	Audio Channels
DV (SD)	720x480	59.94i	Lower	DV	25 CBR	2 channels, 32 kHz, 16 bit
DV (SD)	720x576	50i	Lower	DV	25 CBR	2 channels, 32 kHz, 16 bit

Supported video devices

Catalyst Browse supports the following video volumes and devices:

Folder Structure	Storage Media	Root Folder	Supported Format
XAVC-XD-Style	SxS memory card (exFAT) XQD memory card	XDROOT	XDCAM HD/HD422/IMX/DVCAM, SStP, XAVC Intra, XAVC Long
XAVC-M4-Style	SxS memory card (exFAT) XQD memory card SD card	M4ROOT	XAVC S, XAVC HS
XAVC-PX-Style	SD card	PXROOT	XAVC Proxy
AXS-Style	AXS memory card	CINEROOT	F55RAW, F5RAW, FS700RAW, X-OCN
SRM-Style	SR memory card	Media root	F65RAW, SStP
XD-Style	Professional Disc SxS memory card (UDF)	Media root	XDCAM HD/HD422/IMX/DVCAM, XAVC Intra

Folder Structure	Storage Media	Root Folder	Supported Format
BPAV-Style	SxS memory card (FAT32) SD card	BPAV	XDCAM EX (MPEG HD, DVCAM)
AVCHD structure	SD card	AVCHD/BDMV	AVCHD

Playing media

When you double-click a file in Media Browser mode, the file is loaded in View mode, where you can preview the file, log mark in and mark out points, and apply color correction. For more information about using Media Browser mode, please see ["Finding media" on page 17](#).



You can use the toolbar at the top of the pane to adjust and monitor audio levels, select audio channels for preview, scale the video preview, view metadata, and adjust clip settings.


You can use the transport toolbar below the video to choose the playback mode, scrub the video, and control playback.

Previewing video

When you double-click a file in Media Browser mode, the file is loaded in View mode, where you can preview the file, log mark in and mark out points, and apply color correction. For more information about using Media Browser mode, please see ["Finding media" on page 17](#).

You can also choose to display the video preview in a secondary window that you can position anywhere on your screen or on a secondary display. For more information, see ["Editing Catalyst Browse options" on page 135](#).

 If you have multiple clips selected in the Media Browser on the left side of the window, the selected clips will play sequentially in the order they are displayed. The file name of the current file will be displayed above the video preview, and a vertical line in the timeline indicates where each selected clip begins:



If the current clip contains discontinuous timecode, an indicator is displayed in the timeline to identify the discontinuity:



A  indicates a clip from an Optical Disc Archive volume.


An  on a thumbnail indicates that a clip spans multiple discs on an Optical Disc Archive volume. When you play a clip that spans discs, an indicator is displayed in the timeline to identify the point where the clip switches discs:



Enable the Preview using proxy clips switch in Options if you want to use proxy clips for playback if they are available. During playback, a Proxy indicator is displayed above the video preview. For more information, see ["Editing Catalyst Browse options" on page 135](#).

Click the Play  button to start playing the current video. Playback will start from the playback position indicator and continue until the Mark Out position or the end of the file.

You can click the trackbar below the transport controls to set the play position indicator:

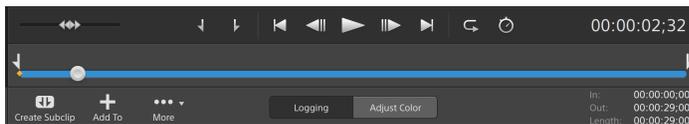


You can use the shuttle control on the transport toolbar to seek forward or backward or adjust the playback speed. For more information, see ["Playing media" on page 60](#).

 For information about flipping and rotating video, enabling anamorphic desqueezing, and displaying safe zone and mask guides, please see ["Playing media" on page 64](#).

Changing the preview mode

When you're adjusting color correction, you can change the preview mode to allow you to compare adjusted clips to the original source. For more information, see ["Editing Color Adjustments controls" on page 87](#).

Click the Preview button in the top-right corner of the video preview to choose a preview mode. Split-screen previews allow you to split the video preview and waveform/histogram/vectorscope monitor so you can see your affected and unaffected video at the same time.

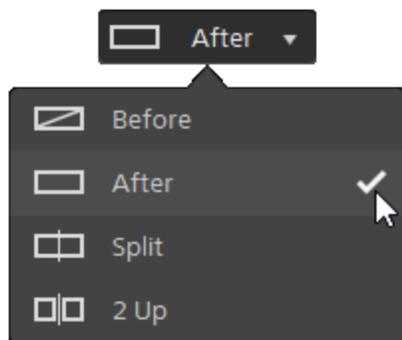

-  Before: full-frame video is displayed in its original state.
-  After: full-frame video is displayed in its color-corrected state.
-  Split: a single frame is displayed in a split-screen view with the original video on the left and the color-corrected video on the right.


- 💡 If you want to move the split location, hover over the preview frame. When the split point is displayed, you can drag the handles at the top or bottom of the screen to adjust where the preview is split:



-  2 Up: two full frames are displayed in a split-screen view with the original video on the left and the color-corrected video on the right.

Scaling the video preview

Click the magnifying glass to adjust the size of the video preview.

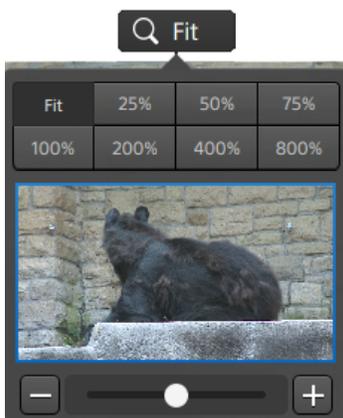

- Click Fit to scale the video to fill the Video pane.
- Click a preset to scale the video to a predefined magnification level.

When the level is below 100%, you can drag the blue rectangle to pan and adjust the visible portion of the frame.

- Drag the slider or click the  and  buttons to choose a custom zoom level.
- Click the thumbnail and roll your mouse wheel to zoom in or out.

Toggling full-screen playback

Click  to display the Video pane in full-screen mode. Press Esc or click the Close button to exit full-screen mode.

Adjusting playback settings

Click the Playback Settings button to the left of the transport controls to display the Playback Settings controls.

Speed/Quality

Select Speed if you want decoding to be optimized to preserve the frame rate.

Select Quality if you want decoding to be optimized to preserve video quality.

Real Time/All Frames

Select Real Time if you want to play the clip using its source frame rate. Audio is played at its recorded rate, and video frames are skipped if necessary to preserve the playback rate.

Select All Frames if you want to ensure that all video frames are played. The frame rate may be reduced if needed to ensure all frames are played. Audio is unavailable in this mode.

 If XAVC S and XAVC HS playback is not smooth, we recommend using the **All Frames** playback setting.

- Real Time/Speed: 
- Real Time/Quality: 
- All Frames/Speed: 
- All Frames/Quality: 

Using the transport controls

The transport controls below the video preview allow you to control playback:

Button	Description
 Go to Start	Moves the playback position indicator to the Mark In position. Click again to move to the beginning of the selected file.
 Previous Frame	Moves the playback position indicator one frame or field to the left.
 Play	Playback will start from the playback position indicator and continue until the Mark Out position or the end of the file.
 Next Frame	Moves the playback position indicator one frame or field to the right.
 Go to End	Moves the playback position indicator to the Mark Out position. Click again to move to the end of the selected file.
 Loop Playback	Plays only the area between the Mark In and Mark Out points in a continuous mode.

For more information, see ["Marking in and out points for playback" on page 61](#).

Navigating the timeline

After you open a file in View mode, drag the shuttle control to seek forward or backward from the play position indicator to find an edit point. As you drag toward the ends of the shuttle control, playback speed increases. Release the shuttle control to stop playback:



You can also press the J, K, or L keys to use the keyboard as a shuttle control.

 Press and hold K while pressing J or L to emulate a shuttle knob mode. Press K+J to scrub left or K+L to scrub right.

Item	Description
J	Scrub reverse mode. Press again to accelerate the playback rate.
K	Pause.
L	Scrub forward mode. Press again to accelerate the playback rate.


Marking in and out points for playback

If you want to play only a portion of a video, you can select the portion of the video you want to play.


1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Double-click a file in Media Browser mode to load it in View mode.

 You can also use the Preview pane in Media Browser mode to adjust mark points.

3. Click the Logging button at the bottom of the Catalyst Browse window.
4. Click the trackbar below the transport controls to set the play position indicator:

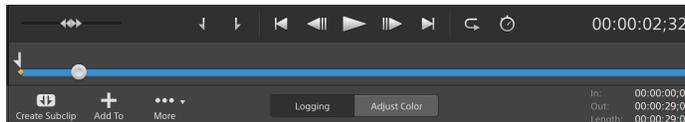

If the current clip contains discontinuous timecode, an indicator is displayed in the timeline to identify the discontinuity:



5. Click the Mark In button.
6. Click the trackbar below the transport controls to set the play position indicator.
7. Click the Mark Out button.

When you click the Play  button, playback will start from the playback position indicator and continue until the Mark Out position or the end of the file.

If you want to play the Mark In/Mark Out region in a continuous loop, select the Loop Playback button .

 You can quickly log mark in/out points by clicking the In, Out, and Length boxes at the bottom of the Catalyst Browse window and typing new timecode values. (Not available for MXF proxy-only clips with embedded timecode.)

Type new values in the Mark in and Mark out boxes on the Summary tab in the Inspector to edit the clip's mark in and mark out points. (Not available for MXF proxy-only clips with embedded timecode.) For more information, see ["Viewing and editing metadata" on page 67](#).

You can adjust mark in/out points by dragging the indicators above the trackbar.

To reset mark in/out points, click the More button and choose Reset mark in/out points.

If the current file contains essence marks, they will be displayed on the timeline as diamonds . Essence marks are displayed in the Mark Points tab in metadata mode.


For more information, see ["Viewing and editing metadata" on page 67](#).

Creating a snapshot of a frame

If you want to create a snapshot of the current frame, click the Snapshot button  and choose Copy snapshot to clipboard or Save snapshot.

Copying a frame to the clipboard

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Double-click a file in Media Browser mode to load it in View mode.
3. Click the trackbar below the transport controls to set the play position indicator:

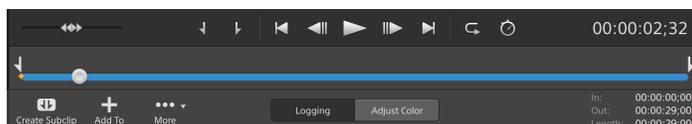


4. Click the Snapshot button  and choose Copy snapshot to clipboard from the menu.

 Press Ctrl+C (Windows) or  -C (macOS).

The current frame is copied to the clipboard using the standard resolution that is closest to the preview resolution.

Saving a frame to a file

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Double-click a file in Media Browser mode to load it in View mode.
3. Click the trackbar below the transport controls to set the play position indicator:

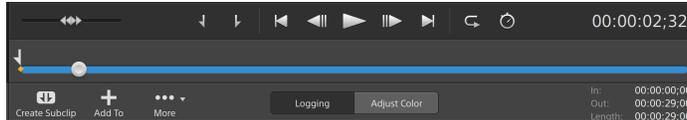

4. Click the Snapshot button  and choose Save snapshot from the menu.




Press Shift+S.

The current frame is copied to the clipboard using the standard resolution that is closest to the preview resolution.

You can save the location and format used for saving the file in Options. Click the Snapshot button  and choose Snapshot options from the menu. For more information, see ["Editing Catalyst Browse options" on page 135.](#)

Adjusting and monitoring audio levels

Click the speaker in the activity pane at the top of the Catalyst Browse window to display audio controls.

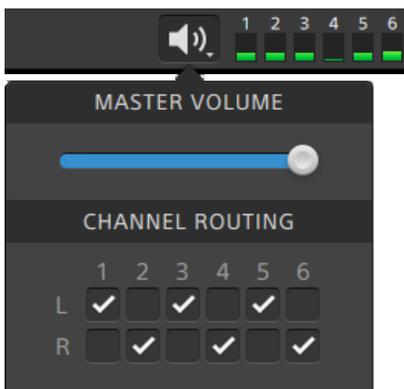


Drag the Master Volume fader to increase or decrease audio levels. During preview, the meters allow you to monitor the level of each audio channel.

If you want to choose which audio channels will be played, you can use the Channel Routing check boxes. In the example above, the 1st, 3rd, and 5th channels are played through the left speaker and the 2nd, 4th, and 6th channels are played through the right speaker.

 Catalyst Browse supports only stereo output devices.

Editing clip settings

Click the  button above the video preview to edit clip playback settings.

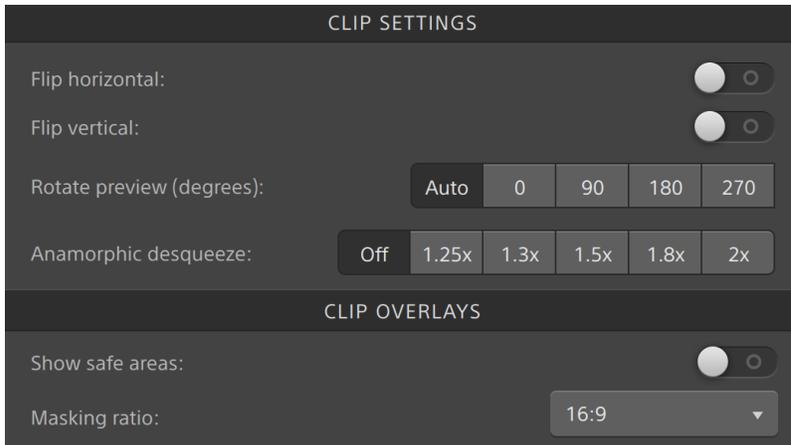

 Select the Use flip, rotate, and desqueeze settings check box in the Export pane if you're working with video that was filmed with an anamorphic lens and want to preserve the Flip horizontal and Flip vertical, Rotate preview, and Anamorphic desqueeze settings when transcoding. When the check box is not selected, letterboxing will be applied.

For more information, see ["Saving and sharing clips" on page 119](#).

Item	Description
Flip horizontal	Click the Flip horizontal or Flip vertical switch to flip the left-to-right or top-to-bottom orientation of the video frame.
Flip vertical	
Rotate preview (degrees)	Select a button to rotate the video preview image. Select Auto to use the clip-rotation metadata setting if available, or select 0, 90, 180, or 270 to specify the desired clip rotation.
Anamorphic desqueeze	Select a desqueeze button to apply anamorphic stretching to widescreen video, or click Off to turn off stretching.
Show safe areas	Click the switch to enable safe area guides and a center point in the video preview.

Item	Description
	<p>When Show safe areas is enabled, Catalyst Browse displays rectangles marking 90% (action safe area) and 80% (title safe area) of the frame to serve as guidelines for framing.</p> <p> Overlays are not displayed when using full-screen preview.</p>
Masking ratio	<p>Choose a setting from the drop-down list to enable shading in the video preview to indicate how your content will appear.</p> <p> Overlays are not displayed when using full-screen preview.</p> <p>Aspect markers from Sony cameras are supported and preserved even when the clip is rotated.</p> <p>Select Use masking ratio from the Crop type drop-down list in the Export pane if you want to preserve the selected masking ratio when transcoding.</p> <p>For more information, see "Saving and sharing clips" on page 119.</p>

Working with clips

Catalyst Browse gives you control over your individual media clips.

Viewing and editing metadata

When you're in Media Browser or View mode, click the Inspector button  in the toolbar to display metadata for the currently selected file in the Inspector pane.


Click the Summary tab to view summary information associated with the file.

Click the File tab to view details about the source media and its metadata, including GPS information (if present).

Click the Mark Points tab to view essence marks embedded in the file.

If the current file contains essence marks, they will be displayed on the timeline as a diamond .

If the current clip contains discontinuous timecode, an indicator is displayed in the timeline to identify the discontinuity:



When Catalyst creates new non-realtime (NRT) metadata during MXF copy operations, metadata for discontinuous timecode and essence marks is created.

-  New non-realtime metadata is not created when the source clip contains NRT metadata.
-  When a clip list is selected in Browse mode, the Metadata pane displays additional information about the currently selected clip list. When a clip list is open in View (Clip List or Clip) mode, the Metadata pane displays information about the selected subclip. For more information, see ["Working with clip lists" on page 69](#).
-  Editing metadata is not available when Catalyst Browse is started in view-only mode.
-  When you edit the metadata for a proxy file, the metadata for the full-resolution clip is updated when you copy the proxy clip back to the device. For more information, see ["Copying files" on page 22](#).

Editing mark in/out points

Click the Summary tab.

Type new values in the Mark in and Mark out boxes to edit the clip's mark in and mark out points. For more information, see ["Marking in and out points for playback" on page 61](#).

Editing summary metadata

1. Click the Summary tab.

Click the Unlock button  to enable editing summary information for the selected files.


2. In the Logging section of the Summary tab, edit the Flag, Title, Creator, and Description settings as needed.

When editing metadata for multiple selected files, (multiple values) is displayed if the files' metadata does not match. Editing the value will replace the metadata for all selected files.

3. Click Save  to save the edited metadata values, or click Revert  to discard your edits.

 Not all media formats support summary metadata.

 When a clip has Flag metadata, an OK, NG (no good), or Keep indicator is displayed in Media Browser mode:

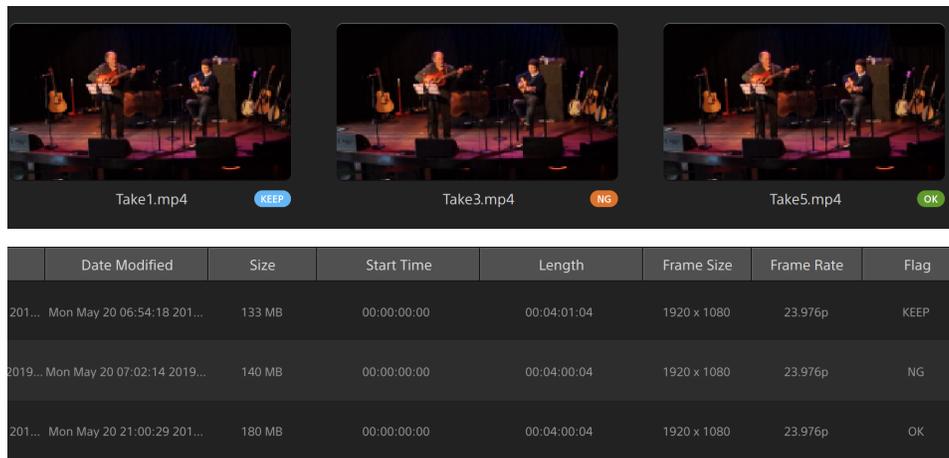

The screenshot shows three video clips in a Media Browser interface. Each clip has a flag indicator below it: 'Take1.mp4' has a blue 'KEEP' button, 'Take3.mp4' has an orange 'NG' button, and 'Take5.mp4' has a green 'OK' button. Below the clips is a table with the following columns: Date Modified, Size, Start Time, Length, Frame Size, Frame Rate, and Flag.

Date Modified	Size	Start Time	Length	Frame Size	Frame Rate	Flag
201... Mon May 20 06:54:18 201...	133 MB	00:00:00:00	00:04:01:04	1920 x 1080	23.976p	KEEP
2019... Mon May 20 07:02:14 2019...	140 MB	00:00:00:00	00:04:00:04	1920 x 1080	23.976p	NG
201... Mon May 20 21:00:29 201...	180 MB	00:00:00:00	00:04:00:04	1920 x 1080	23.976p	OK

 You can also use Flag metadata to filter the contents of the Media Browser. For more information, see ["Filtering clips" on page 21](#).

Editing essence marks

1. Select a clip to display its metadata.
2. Click the Mark Points tab.
3. Click an essence mark's label or timecode value to type a new value.

 Adding and editing essence marks is supported only for clips with non-realtime (NRT) metadata and requires write access to the volume.

Editing essence marks is not available when FTP-based clips are selected.

Adding a mark point

1. Select a clip to display its metadata.
2. Click the Mark Points tab.
3. Click the trackbar below the video preview to set the cursor position where you want to add a mark point (or click the timecode display to move the cursor to a specific location).
4. Click the Add Point button or press E.

 Adding and editing essence marks is supported only for clips with non-realtime (NRT) metadata and requires write access to the volume.

Deleting a mark point

1. Select a clip to display its metadata.
2. Click the Mark Points tab.
3. Click an essence mark's label or timecode to select it.
4. Click the Delete button .

 The Delete command is not available when FTP-based clips are selected.

Working with clip lists

You can create and edit clip lists for the following media types:

- XDCAM media in an XD root folder .
- XAVC media in an XD root folder .
- RAW media in an AxS folder .

A clip list is a PD-EDL (.smi) file that allows you to create a video project that is comprised of multiple, shorter video clips.

Clip lists are a helpful part of a proxy workflow when working with limited bandwidth: copy the proxy clips to your computer, create a clip list using the proxy clips, and then copy the clip list back to the camera or deck. The deck will then play the clip list using your full-resolution source.

 When viewing a clip list,  indicates spanned clips from the same volume, and  indicates spanned clips from different volumes.

Creating a clip list

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Navigate to the root folder  or  that contains the clips you want to use.
3. Select the files you want to include in your clip list. You can hold Shift or Control (Windows) / ⌘ (macOS) to select multiple files.
4. Click the Tools button  at the bottom of the Catalyst Browse window and choose New clip list from selection from the menu.

 If you want create a clip list without choosing clips, click the Tools button  at the bottom of the Catalyst Browse window and choose New empty clip list from the menu.

5. Type a name for the new clip list and click OK.
6. Catalyst Browse loads your new clip list in View mode.


Opening a clip list

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Navigate to the root folder  or  that contains the clip list you want to open.
3. Double-click the clip list (.smi file) to open it.

Rearranging clips

In Clip List mode, you can add, remove, and arrange clips in the clip list. Click the Clip List button at the bottom of the Catalyst Browse window to switch to Clip List mode.

You can drag clips within the clip list to rearrange them. Drag a clip and drop it to a new position on the clip list to change its position.

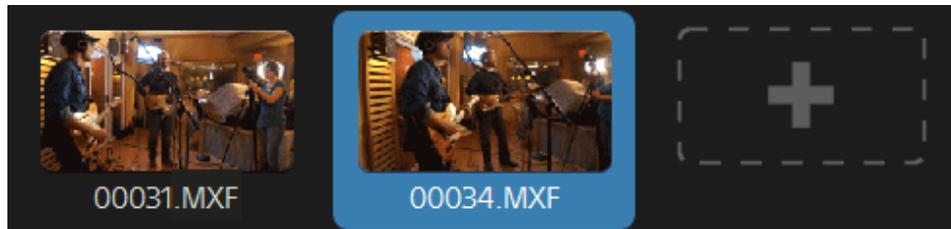


Adding clips

In Clip List mode, you can add, remove, and arrange clips in the clip list. Click the Clip List button at the bottom of the Catalyst Browse window to switch to Clip List mode.


 You can only add clips from the folder where the clip list (.smi) file is saved.

Click the add button at the end of the clip list to display a media browser, where you can select additional clips for your clip list.

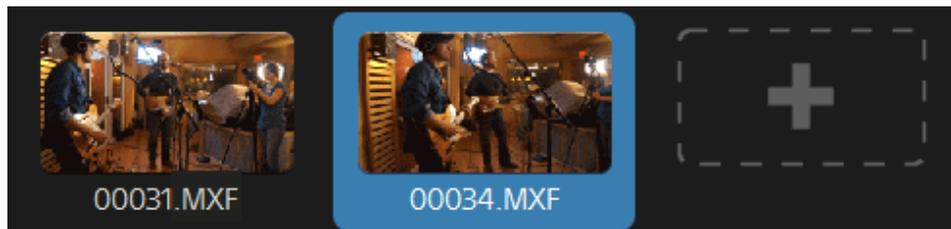

 You can click the Add button at the bottom of the Catalyst Browse window when you're in Clip List mode.

When you add a clip, a vertical line is added to the timeline to indicate where each clip begins:



Removing clips

In Clip List mode, you can add, remove, and arrange clips in the clip list. Click the Clip List button at the bottom of the Catalyst Browse window to switch to Clip List mode.

Select a clip and click the Remove button  at the bottom of the Catalyst Browse window.

Editing clips

In Clip mode, you can log mark in and out points for your clips.

 You cannot add, delete or rearrange clips in Clip mode. Use Clip List mode for clip list editing.

1. Open the clip list you want to edit.
2. Click the Clip button at the bottom of the Catalyst Browse window to switch to Clip mode.

 You can also double-click a clip in Clip List mode to switch to Clip mode.

3. Select the clip you want to edit.
4. Use the Mark In and Mark Out buttons to adjust the mark in and out points for the selected clip.

For more information, see ["Marking in and out points for playback" on page 61](#).

Viewing metadata for clip lists

When you're in Media Browser or View mode, click the Inspector button  in the toolbar to display metadata in the Inspector pane.

In Browse mode, the Metadata pane displays additional information about the currently selected clip list.

In View (Clip List or Clip) mode, the Metadata pane displays information about the selected subclip.

For more information, see ["Viewing and editing metadata" on page 67](#).

Writing a clip list back to a device

Select a clip list in Media Browser mode and click the Copy button  at the top of the Catalyst Browse window to write a clip list back to a device. For more information, see ["Saving and sharing clips" on page 119](#).

Working with EDLs

You can use Catalyst Browse to import an EDL.

Importing an EDL

1. Click the Tools button  at the bottom of the Catalyst Browse window and choose Import EDL. The Import EDL dialog is displayed.
2. Select the EDL you want to import.
3. Choose a setting from the Frames per second drop-down list to set the frame rate of the EDL.
4. Click Import. The EDL Import workspace is displayed with the contents of the EDL.

Linking and unlinking clips

After you import an EDL, you can use the EDL Import workspace to link and unlink clips.

To link your clips, select a clip, click the Link button  (or double-click an unlinked clip's thumbnail) and browse for the source media.

 If other unlinked clips exist in the folder, they will be linked automatically. If you want to link only the selected clip, clear the Automatically link clips check box.

To unlink a clip, select it and click the Unlink button . If you want to unlink all clips, click the More button and choose Unlink all from the menu.

Replacing clips

You can use the Replace media command to replace a clip in an EDL with a different media file.

1. Select a clip in the EDL.
2. Click the More button and choose Replace media from the menu.
3. Browse to the new clip and click OK.

Catalog export

Catalyst Browse can export a PDF or CSV (comma-separated value) list of clips in a folder.

 The Generate PDF catalog and Generate CSV catalog commands are not available for clips on FTP devices, XDCAM Station volumes via CIFS, XDCAM decks, XDCAM Drive units, or Optical Disc Archive volumes.

 Generated catalogs are limited to three clips in Catalyst Browse.

Generating a PDF catalog

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Select the folder or clips you want to catalog.
3. Perform either of the following actions to generate a catalog from the selected folder:
 - Click the Tools button  at the bottom of the Catalyst Browse window and choose Generate PDF catalog from the menu.
 - Right-click the folder and choose Generate PDF catalog from the shortcut menu.

The Export Catalog dialog is displayed.

4. In the Title box, type a title to identify your catalog. This title will be displayed at the top of the generated catalog.
5. In the Description box, type a description of the catalog. The description will be displayed below the title in the generated catalog and can help you identify the clips in the catalog.
6. In the Export PDF to box, type the path to the folder where you want to save the generated catalog, or click Browse to choose a folder.
7. Select a Layout radio button to choose the appearance of the catalog:

- Text with 1 thumbnail: Displays metadata text with a thumbnail of the first frame.
- Text with 3 thumbnails: Displays metadata text with thumbnails of the first, middle and end frames.

The space below the radio buttons displays a sample of the selected layout.

8. In the Metadata list, select the check boxes for the metadata values you want to include in the catalog.

Click the Tools button  at the top of the Metadata list and choose Reset to default or Clear all to clear the current selection.

9. Click Export to generate the catalog with the selected content.

Generating a CSV catalog

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Select the folder or clips you want to catalog.
3. Perform either of the following actions to generate a catalog from the selected folder:
 - Click the Tools button  at the bottom of the Catalyst Browse window and choose Generate CSV catalog from the menu.
 - Right-click the folder and choose Generate CSV catalog from the shortcut menu.

The Export Catalog dialog is displayed.

4. Navigate to the folder where you want to save the CSV file and type a file name in the File name box.
5. Click OK to generate the catalog with the selected content.

Combining relay clips

You can use Catalyst Browse to combine AVCHD relay-recorded clips into a single clip.

A relay clip is a continuous recording that spans multiple media cards.

 Before combining relay clips, copy them to a single folder. For more information, see ["Saving and sharing clips" on page 119](#).

1. Select the clips you want to combine.

 Clips must be of the same operating point and the timecode must be sequential.

2. Click the Tools button  at the bottom of the Catalyst Browse window and choose Combine relay clips. The Combine Relay Clips dialog is displayed.

 The Combine relay clips command is not available when FTP-based clips are selected.

3. In the Combined file name box, type the name you want to use for the new clip.
4. Click OK.

Synchronizing multicamera clips

You can use Catalyst Browse to synchronize audio in clips from a multicamera shoot.

When you synchronize clips, the mark-in points of the selected clips are adjusted as needed to allow the clips to play in synchronization. Synchronizing your clips in Catalyst Browse streamlines the process of editing multicamera video in a nonlinear editor.

1. Select the MXF clips you want to synchronize.
2. Click the Tools button  at the bottom of the Catalyst Browse window and choose Synchronize multicam clips.

Progress is displayed while the clips are analyzed and synchronized.

 The Synchronize multicam clips command is not available when FTP-based clips are selected.

Stabilizing clips

Catalyst Browse allows you to use metadata from clips to stabilize the image.

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Select the clip you want to stabilize. An  on a thumbnail indicates a clip that contains stabilization metadata.

 The stabilize icon is not displayed for clips on FTP devices, XDCAM Station volumes via CIFS, XDCAM decks, XDCAM Drive units, or Optical Disc Archive volumes.

 For information about camera settings for enabling stabilization using metadata, please see [Information on Software Applications](#).

Clip stabilization is not supported when changing camera settings or detaching the lens during clip recording.

3. Perform any of the following actions to display the Correct clip workspace:

- Click the Stabilize button  at the bottom of the Catalyst Browse window.
- Right-click the clip in the Media Browser pane and choose Stabilize clip from the shortcut menu.


 The Stabilize button  is not available when multiple clips are selected.

When the Catalyst Browse window is resized, the Adjust color , Lens breathing compensation , and Stabilize clip  buttons are available in the Adjustments menu .

4. Use the Correct clip workspace to preview and adjust stabilization settings for the selected clip:

- a. Set the Mark In/Out points to indicate the portion of the clip you want to correct. For more information, see ["Marking in and out points for playback" on page 61](#).
- b. Choose a Stabilization mode setting:
 - Select the Auto button in the Inspector to adjust stabilization automatically.

The graph below the preview helps you visualize the stabilization. Please note that the graph is not displayed when multiple clips are selected.

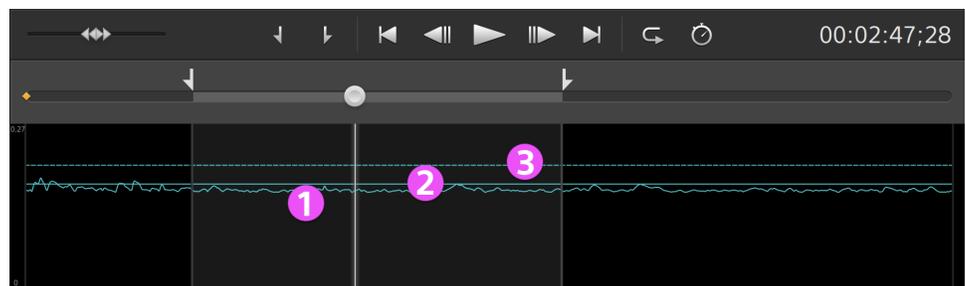

- The curve (1) represents the amount of stabilization that is required based on clip analysis.
- The solid line (2) represents the Auto cropping amount after analysis.
- The dashed line (3) represents the Maximum cropping amount setting.



Click the Graph button  to customize the display of the graph:

- Turn on the Scale graph to clip switch to adjust the vertical scale of the graph to match the current clip.
- When Scale graph to clip is off, you can drag the Graph scale slider to set the vertical scale of the graph.


Item	Description
Auto cropping amount	After the clip is analyzed, this indicator represents the amount of cropping that will be used to stabilize the clip.
Maximum cropping amount	<p>Drag the slider – or the dashed line (3) in the graph – to set the amount of cropping that can be applied to stabilize a clip.</p> <ul style="list-style-type: none"> ▪ If the automatic adjustment results in a clip that is larger than the maximum cropping amount, the Maximum cropping amount will be used. ▪ If the automatic adjustment results in a clip that is smaller than the Maximum cropping amount setting, the automatic adjustment results will be used. <p>This setting is persisted when changing the selected clip or exiting the Correct clip workspace.</p> <p> When stabilizing a clip using a Maximum cropping amount setting that is too large, clips with significant camera shake may exhibit a black border around the frame. We recommend using a setting that is close to the default cropping size in manual mode. To check the default manual cropping size, click the Manual button or double-click the Cropping amount slider handle to reset the setting to its default.</p>
Source	Displays the dimensions of the source media before cropping

Item	Description
resolution	is applied.
Corrected crop resolution	Displays the dimensions of the stabilized frame after cropping is applied.
Minimum crop resolution	Displays the minimum dimensions of the stabilized frame based on the Maximum cropping amount setting.

 If source clips captured with Active image stabilization mode exhibit blurring when using Auto mode, choose Manual mode and decrease the Cropping amount setting.

- Select the Manual button if you want to adjust stabilization settings:

The graph below the preview helps you visualize the stabilization. Please note that the graph is not displayed when multiple clips are selected.

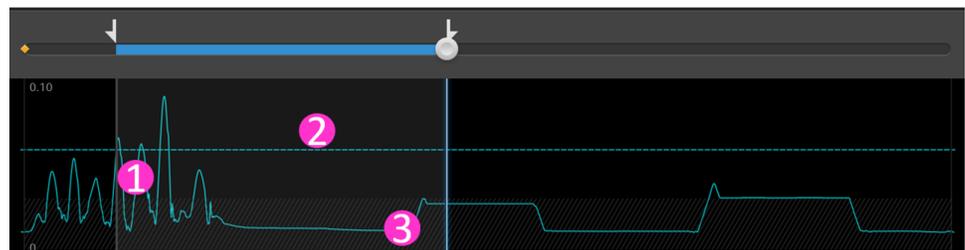

- The curve (1) represents the amount of stabilization that is required based on clip analysis.
- The dashed line (2) represents the Cropping amount setting.

 Click the Graph button  to customize the display of the graph:

- Turn on the Scale graph to clip switch to adjust the vertical scale of the graph to match the current clip.
- When Scale graph to clip is off, you can drag the Graph scale slider to set the vertical scale of the graph.
- Region (3) indicates the minimum cropping amount without displaying black borders around the frame.

Item	Description
Cropping amount	<p>Drag the slider – or the line (2) in the graph – to set the amount of cropping that is applied to stabilize a clip.</p> <p>This setting is persisted when changing the selected clip.</p> <p> When stabilizing a clip using a Cropping amount setting smaller than the default value, clips with significant camera shake may exhibit a black border around the frame. We recommend using a Cropping amount setting that is close to the default value. You can double-click the slider handle to reset the setting to its default.</p>
Source resolution	Displays the dimensions of the source media before cropping is applied.
Corrected crop resolution	Displays the dimensions of the stabilized frame after cropping is applied.

1. Click the Analyze button to analyze the selected clip and update the preview to show the stabilized clip.

After analysis, the Summary section of the Info panel displays the corrected crop resolution.

2. Click the Before/After button at the top of the video preview to choose a preview mode so you can compare your original and stabilized video before applying the changes, and then use the transport controls above the timeline to preview the clip.
 -  Before: the clip is displayed in its original state.
 -  After: the cropped and stabilized clip is displayed.
 -  2 Up: two full frames are displayed in a split-screen view with the original video on the left and the stabilized video on the right.
3. To save a clip with the stabilization settings, click the Export button  at the top of the Catalyst Browse window, and use the Export pane to choose a destination and format for your exported files. Click the Export button at the bottom of the Export pane to start exporting the selected clip.

For more information about the controls, please see ["Saving and sharing clips" on page 119](#).

Lens breathing compensation

Lens breathing refers to a shifting of the angle of view or focal length of a lens when the focus changes. Catalyst Browse allows you to use metadata from clips to compensate for the effect of lens breathing.

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.

2. Select the clip you want to correct. An  on a thumbnail indicates a clip that contains metadata for lens breathing compensation.

 The lens breathing icon is not displayed for clips on FTP devices, XDCAM Station volumes via CIFS, XDCAM decks, XDCAM Drive units, or Optical Disc Archive volumes.

 For information about camera settings for enabling compensation using metadata, please see [Information on Software Applications](#).

Lens breathing compensation is not supported when changing camera settings or detaching the lens during clip recording.

3. Perform any of the following actions to display the Correct clip workspace:

- Click the Lens breathing button  at the bottom of the Catalyst Browse window.
- Right-click the clip in the Media Browser pane and choose Lens breathing compensation from the shortcut menu.

 The Lens breathing button  is not available when multiple clips are selected.

When the Catalyst Browse window is resized, the Adjust color , Lens breathing compensation , and Stabilize clip  buttons are available in the Adjustments menu .

4. Use the Correct clip workspace to preview and adjust settings for the selected clip:
 - a. Set the Mark In/Out points to indicate the portion of the clip you want to correct. For more information, see ["Marking in and out points for playback" on page 61](#).
 - b. Choose a Compensation mode setting to compensate for lens breathing:

- Select the Auto button in the Inspector to adjust cropping automatically.

Item	Description
Auto cropping amount	After the clip is analyzed, this indicator represents the amount of cropping that will be used to correct the clip.
Maximum cropping amount	<p>Drag the slider to set the amount of cropping that can be applied to correct a clip.</p> <ul style="list-style-type: none"> ▪ If the automatic adjustment results in a clip that is larger than the maximum cropping amount, the Maximum cropping amount will be used. ▪ If the automatic adjustment results in a clip that is smaller than the Maximum cropping amount setting, the automatic adjustment results will be used. <p>This setting is persisted when changing the selected clip or exiting the Correct clip workspace.</p> <p> When correcting a clip using a Maximum cropping amount setting that is too large, clips with significant lens breathing may exhibit a black border around the frame. We recommend using a setting that is close to the default cropping size in manual mode. To check the default manual cropping size, click the Manual button or double-click the Cropping amount slider handle to reset the setting to its default.</p>
Source resolution	Displays the dimensions of the source media before cropping is applied.
Corrected crop resolution	Displays the dimensions of the frame after cropping is applied.
Minimum crop resolution	Displays the minimum dimensions of the corrected frame based on the Maximum cropping amount setting.

- Select the Off button if you do not want Catalyst Browse to compensate for lens breathing. If the clip includes in-camera breathing compensation, it will be preserved.

1. Click the Analyze button to analyze the selected clip and update the preview to show the corrected clip.

After analysis, the Summary section of the Info panel displays the corrected crop resolution.

2. Click the Before/After button at the top of the video preview to choose a preview mode so you can compare your original and corrected video before applying the changes, and then use the transport controls above the timeline to preview the clip.
 -  Before: the clip is displayed in its original state.
 -  After: the cropped and corrected clip is displayed.
 -  2 Up: two full frames are displayed in a split-screen view with the original video on the left and the corrected video on the right.

 In some cases, Catalyst lens breathing compensation can be less effective than in-camera lens breathing compensation if stabilization is also enabled. Use the Preview pane to compare the original and corrected clip. You can set Stabilization mode or Compensation mode to Off as needed before exporting the corrected clip.

3. To save a clip with the corrected settings, click the Export button  at the top of the Catalyst Browse window, and use the Export pane to choose a destination and format for your exported files. Click the Export button at the bottom of the Export pane to start exporting the selected clip.

For more information about the controls, please see ["Saving and sharing clips" on page 119](#).

Repairing flash bands

When a camera flash is fired, it can create a band of light in your video.

Catalyst Browse can detect and remove flash bands.

 Flash-band repair is not available when Catalyst Browse is started in view-only mode.

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Select the clip you want to repair.
3. Click the Tools button  at the bottom of the Catalyst Browse window and choose Repair flash bands. The Flash Band workspace is displayed.
4. Use the Flash Band workspace to identify the flash bands you want to repair:

- a. Set the Mark In/Out points to indicate the portion of the clip you want to scan. For more information, see ["Marking in and out points for playback" on page 61](#).
- b. Click the Detect button  to scan the clip and mark flash bands automatically. A marker  is added to the timeline, and an entry is created in the Inspector.

 Automatic flash band detection is available only for MXF clips. To mark a flash band manually, click the trackbar below the transport controls to set the play position indicator and click the Add button  in the Inspector.

Please note that automatic and manual flash-band repair can yield different results.

To remove a flash band marker, select it in the Inspector and click the Delete button .

Click the Before/After button in the top-right corner of the video preview to choose a preview mode so you can compare your original and repaired video before applying the changes.

-  Before: full-frame video is displayed in its original state.
 -  After: full-frame video is displayed in its repaired state.
1. Click Repair. The transcode dialog is displayed to allow you to choose settings for the repaired file.

For more information, see ["Saving and sharing clips" on page 119](#).

Working with rotated clips

When clips are recorded with camera-rotation metadata, you can choose how Catalyst Browse treats clip thumbnails and video previews.


 An  on a thumbnail indicates a rotated clip. For more information, see ["Finding media" on page 17](#).

Rotating clip thumbnail frames

1. Click the Options  button to edit application options.
2. Enable the Automatically rotate thumbnails switch to detect clip rotation and adjust thumbnail images in Media Browser mode:



When the switch is off, rotation metadata is ignored when displaying thumbnails:

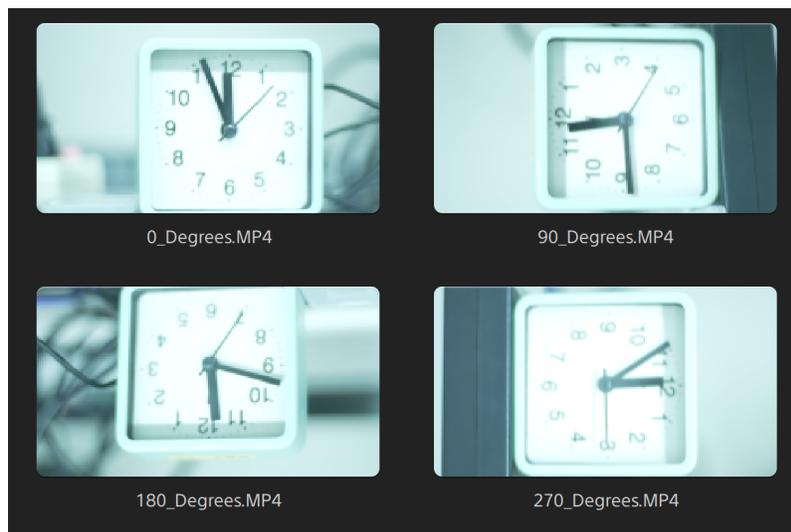

Rotating the video preview

1. Double-click a clip in Media Browser mode to preview it:
2. Click the  button above the video preview.
3. In Clip Settings, select a Rotate preview (degrees) button to rotate the video preview image.

Select Auto to use the clip-rotation metadata setting if available, or select 0, 90, 180, or

270 to specify the desired clip rotation.

For more information, see ["Playing media"](#) on page 64.

Applying color correction

If you've used multiple cameras within a project or if the lighting varies between shots, the resulting clips can look noticeably different. You can use color correction to minimize the differences or to apply an artistic look to your clips.

 Color-correction settings are applied globally to all clips. If you want to save your color-correction settings, you can transcode clips to create new files. For more information, see ["Saving and sharing clips" on page 119](#).

 Color correction is not available when Catalyst Browse is started in view-only mode.

Editing Color Adjustments controls

You can use the Color Adjustments controls in the Inspector  to perform color grading that is applied globally to all clips. If you want to save your color-correction settings, you can transcode clips to create new files. For more information, see ["Saving and sharing clips" on page 119](#).

 Color adjustments are not available when Catalyst Browse is started in view-only mode.

Loading a clip/clip list for color adjustments and configuring the waveform, histogram, and vectorscope monitors

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Perform any of the following actions to display the Adjust color workspace:
 - Select a clip in the Media Browser pane, and click the Adjust color button  at the bottom of the Catalyst Browse window.

 When the Catalyst Browse window is resized, the Adjust color , Correct lens breathing , and Stabilize clip  buttons are available in the Adjustments menu .

- Right-click the image in the Media Browser pane and choose Adjust color from the shortcut menu.
- Double-click a clip or clip list in the Media Browser to load it. Click the Adjust Color button at the bottom of the Catalyst Browse window.

In the Adjust Color workspace, Catalyst Browse displays a waveform/histogram/vectorscope monitor, a video preview, and color controls that you can use to adjust the appearance of your video.

3. The waveform/histogram/vectorscope monitor and video preview window allow you to monitor your adjustments as you edit color values.

The Preview color space setting in Options is also applied to the waveform, histogram, and vectorscope so you can to check your video using scopes. For more information, see ["Editing Catalyst Browse options" on page 135](#).

- Click the Waveform button  at the bottom of the window to toggle the waveform monitor.

The waveform monitor displays the luminance values (brightness or Y component) of your video signal. The monitor plots luminance values on the vertical axis and the width of the current frame on the horizontal axis.

You can use the buttons at the top of the waveform monitor to display overlaid () or separate () RGB waveforms and isolate colors .

Waveform settings

Click the Settings button  to open the Waveform Settings menu. You can use the Waveform Settings menu to change the scale of the waveform monitor and enable AIR matching when grading HDR clips.

- 💡 The Settings button  is available only when the Working color space drop-down is set to Rec-2020/S-Log3 (HDR) and the Preview color space drop-down is set to Rec.2020/S-Log3, Rec.2020/HLG, Rec.2020/HLG AIR Matching, Rec.2020/HLG (bypass OOTF), Rec.2020/PQ, Rec.2020/PQ AIR Matching, or Rec.2020/PQ (bypass OOTF).

For more information, see ["Color management settings" on page 137](#) or ["Editing Catalyst Browse options" on page 135](#).

You can click the % or Nits button to change the units displayed in the waveform.

 When the Preview color space is set to Rec.2020/HLG, Rec.2020/HLG AIR Matching, or Rec.2020/HLG (bypass OOTF), the Nits value is calculated for a peak luminance of 1000 cd/m².

When the Preview color space drop-down is set to Rec.2020/S-Log3, you can use the AIR Matching switch to toggle AIR (Artistic Intent Rendering) matching to achieve a consistent look between Rec.2020/S-Log3-based grading and a configured HLG (hybrid log-gamma) or PQ (perceptual quantizer) monitor.

 The AIR Matching switch is automatically turned on when the Preview color space drop-down is set to Rec.2020/HLG AIR Matching or Rec.2020/PQ AIR Matching.

- Click the Histogram button  at the bottom of the window to toggle the histogram monitor.

The histogram monitor displays the number of pixels that exist for each color intensity. The vertical axis represents the number of pixels, and the horizontal axis represents the RGB color range from 0 to 255.

You can use the buttons at the top of the histogram monitor to display overlaid () or separate () RGB histograms and isolate colors   .

- Click the Vectorscope button  at the bottom of the window to toggle the vectorscope monitor.

The vectorscope monitor allows you to monitor the chroma values (color content) of your video signal. The monitor plots hue and saturation on a color wheel.

The vectorscope displays targets for broadcast-legal saturations of red (R), magenta (Mg), blue (B), cyan (Cy), green (G), and yellow (YI). Individual colors in your video signal are displayed as dots in the vectorscope. A dot's distance from the center of the scope represents its saturation, and the angle of the line from the dot to the center of the scope represents its hue.

For example, if an image has a blue cast, the distribution of dots in the vectorscope will be concentrated toward the blue portion of the color wheel. If the image includes out-of-range blue values, the vectorscope display will extend beyond the blue target.

You can use the vectorscope to calibrate color between scenes. Without calibration, you may see noticeable color differences between scenes from multicamera shoots.


Click the Settings button  to open the Vectorscope Settings menu.

The Vectorscope Settings menu allows you to toggle a monochrome view of the scope, change the scale of the scope, adjust the brightness of the colors displayed in the scope, and adjust the brightness of the scope's guide (graticule).

 Use the 75% Scale setting when your source media uses 75% color bars, or use the 100% setting your source media uses 100% color bars.

- The video preview window displays the current frame at the playback position indicator.

Click the Preview button in the top-right corner of the video preview to choose a preview mode. Split-screen previews allow you to split the video preview and waveform/histogram/vectorscope monitor so you can see your affected and unaffected video at the same time.

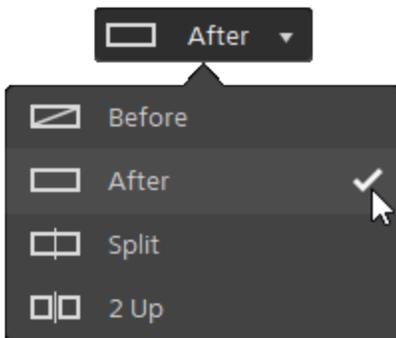

-  Before: full-frame video is displayed in its original state.
-  After: full-frame video is displayed in its color-corrected state.
-  Split: a single frame is displayed in a split-screen view with the original video on the left and the color-corrected video on the right.

- 💡 If you want to move the split location, hover over the preview frame. When the split point is displayed, you can drag the handles at the top or bottom of the screen to adjust where the preview is split:



-  2 Up: two full frames are displayed in a split-screen view with the original video on the left and the color-corrected video on the right.

Adjusting the color wheels

In the Adjust Color workspace, the bottom of the Catalyst Browse window provides color wheels for Lift, Gamma, and Gain. The wheels provide a visual representation of the current adjustments and allow you to adjust color quickly. As you adjust the controls, the waveform/histogram/vectorscope monitor and video preview will update in real time to allow you to check your adjustments.

The color wheels are used to edit ASC-CDL (American Society of Cinematographers Color Decision List) parameters.

Click the Wheels button  to show or hide the color wheels.

Drag the point in the center of the color wheel to pick the hue and saturation you want to add to the video, or drag the slider on the side of the color wheel to increase luminance for all RGB components simultaneously. You can double-click the point to reset the color wheel or double-click the slider handle to reset the luminance.

You can also adjust color wheels with a Tangent control. For more information, see ["Using a Tangent control" on page 101](#).



When you drag the color correction controls, they move in fine increments. To move controls in larger increments, hold Shift while dragging.

Choosing a color space

Click the Inspector button  in the toolbar to display the Inspector pane if it isn't already visible. In the Adjust Color workspace, the Color Space section in the Inspector pane provides color space controls that you can use to choose the source and conversion color spaces.

 If the selected color space is not compatible with the source color space and cannot be exported, a warning is displayed to notify you.

Choosing a source color space

Click the Unlock button  and choose a setting from the Source drop-down list to choose the color space that should be applied to the source media. When you choose a setting, the video preview is updated. The source color space should be detected automatically and does not need to be changed in most cases.

 The Unlock button  is not used when editing RAW or X-OCN video.

 Click the Reset button  at the bottom of the Inspector pane to reset the Source color space based on the clip's metadata.

Converting between HDR/wide color gamut color spaces

When an HDR or wide color gamut color space is selected in the Source drop-down list, you can choose a different HDR/WCG color space from the Convert to drop-down list to apply grading in the selected color space or apply a look profile that is available in the selected color space.

Furthermore, when the source is [S-Gamut/S-Log2], selecting [Convert to] > **[709(800)]** allows you to convert HDR/WCG clips to Rec.709 as well. The **[709(800)]** setting applies a 1D curve. When using a 3D LUT to transform HDR/WCG clips, it is necessary to apply a look profile.

 The Convert to drop-down is available only when the Working color space setting is Rec.709, Log, or ACES and you're working with S-Gamut, RAW, and X-OCN source media.

For more information, see ["Applying a look profile" on page 96](#), ["Grading with hypergamma conversion" on page 104](#), or ["Applying color correction" on page 107](#).

Viewing the working color space

The Working box displays the color space that will be used for color grading. Click the Options  button and choose a setting from the Working color space drop-down list to change the setting.

Viewing the color space for the video preview

The Preview box displays the color space that will be used for the Catalyst Browse video preview window. Click the Options  button and choose a setting from the Preview color space drop-down list to change the setting.

Viewing the color space for the external monitor

If an external monitor is enabled, the External monitor box displays the color space that will be used for the external monitor. Click the Options  button and choose a setting from the External monitor color space drop-down list to change the setting.

If a second external monitor is connected, it will use the Preview color space.

Adjusting exposure, temperature, and tint

Click the Inspector button  in the toolbar to display the Inspector pane if it isn't already visible. In the Adjust Color workspace, the Source Settings section in the Inspector pane provides the Exposure, Temperature, and Tint sliders to adjust the color content of your clip.

 Exposure, temperature, and tint are not available for all color spaces.

Exposure Index (EI)

When clip with a supported source color space is selected, the EI mode controls are displayed. Click an EI mode button to choose how you want to apply exposure index settings:

 Files that include EI metadata display the EI on the File tab of the Inspector pane.

Mode	Description
Metadata	Choose Metadata to automatically apply exposure metadata based on camera settings. The Exposure bar (1) and EI indicator (2) display the EI value.

This mode is selected by default when you choose a clip with EI metadata.




 The ISO and EI values display the current frame values when playback is stopped.

Manual	Choose Manual to adjust exposure manually.
--------	--

This mode is selected by default when you choose an HDR clip that does not include supported EI metadata.

The Exposure slider (1) will show the EI metadata value of the current frame as a black line, and an EI indicator (2) is displayed below the current value.

Drag the slider to adjust the overall brightness of your video (a fixed value is applied to all frames).

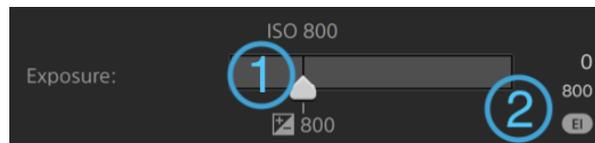

Off	Choose Off to turn off exposure adjustment. The adjustment slider and exposure values are not displayed, and the original sensitivity is used.
-----	--

Temperature

Drag the Temperature slider to adjust the color temperature (in Kelvin) of your video. Adjusting the temperature modifies the red and blue gain by adding an offset to the temperature setting saved in a clip's metadata.

 If your camera does not store color temperature metadata, Catalyst Browse will use a default setting of 3200K.

Tint

Drag the Tint slider to adjust color balance of your video. Adjusting the tint allows you to modify the magenta and green gain to supplement the color temperature.

 Double-click a control to reset its value.

Applying a look profile

You can use the Look controls to apply a look profile/LUT to an HDR clip when the Working color space setting is Rec.709 or Log.

Click the Inspector button  in the toolbar to display the Inspector pane if it isn't already visible. In the Adjust Color workspace, the Look section in the Inspector pane contains controls to apply a LUT automatically based on metadata, manually, or to turn off LUT processing.

For information about adding custom look profiles, see Manual mode in the following table.

Click a LUT mode button to choose how you want to apply a look:

Mode	Description
Metadata	<p>Choose Metadata to automatically apply LUT metadata based on camera settings. The Embedded LUT box displays the LUT metadata.</p> <p>This mode is only available for clips with supported embedded metadata and is selected by default when you choose a clip with LUT metadata.</p> <p> Files that include LUT metadata display a  badge in the Media Browser pane and display the LUT on the File tab of the Inspector pane.</p>
Manual	<p>Choose Manual to choose LUT settings manually:</p> <ul style="list-style-type: none">▪ Convert to: Choose a setting from the drop-down list to convert the clip to a different color space.▪ Look profile: When Convert to is set to an HDR color space – such as S-Gamut3.Cine/S-Log3, S-Gamut3/S-Log3, Rec.2020/S-Log3, Rec.2020/HLG, Rec.2020/PQ, or Rec.709/HLG – you can choose the look profile you want to apply.

Mode	Description
	<p data-bbox="570 254 1398 369"> To add look profiles (including .cube files) to Catalyst Browse, save them in the following folder and then close and restart the application:</p> <p data-bbox="618 405 737 432">Windows:</p> <p data-bbox="618 447 1382 474">C:\Users\<user>\documents\sony\catalyst\color\looks\< p=""> <p data-bbox="618 510 716 537">macOS:</p> <p data-bbox="618 552 1349 579">/Users/<user>/Documents/Sony/Catalyst/Color/Looks/</p> <ul data-bbox="667 615 1406 1220" style="list-style-type: none"> ◦ The sgamut-slog2 subfolder is used for S-Gamut/S-Log2 sources. ◦ The sgamut3cine-slog3 subfolder is used for S-Gamut3.Cine/S-Log3 sources or Convert to choices. ◦ The sgamut3-slog3 subfolder is used for S-Gamut3/S-Log3 sources or Convert to choices. ◦ The rec709-hlg subfolder is used for Rec.709/HLG sources. ◦ The rec2020-hlg subfolder is used for Rec.2020/HLG sources. ◦ The rec2020-pq subfolder is used for Rec.2020/PQ sources. ◦ The rec2020-slog3 subfolder is used for Rec.2020/S-Log3 sources. </user>\documents\sony\catalyst\color\looks\<></p>
	<p data-bbox="570 1255 1398 1430"> If you want to set a default look profile to be applied when no look profile is specified in a clip's metadata, click the Manual button, choose a setting from the Look profile drop-down list, click the Look Tools button  in the LOOK heading, and choose Make default.</p> <p data-bbox="618 1465 1406 1591">To replace the clip's current look profile with the default, click the Manual button, click the Look Tools button , and choose Reset to default.</p>
Off	Choose Off to turn off Look settings.

 Click the Reset button  at the bottom of the Inspector pane to reset the Look profile based on the clip's metadata.

Adjusting the tone curve

Click the Inspector button  in the toolbar to display the Inspector pane if it isn't already visible. In the Adjust Color workspace, the Tone Curve section in the Inspector pane contains a color curve you can use to adjust the red, green, and blue channels graphically. As you adjust the controls, the waveform/histogram/vectorscope monitor and video preview will update in real time to allow you to check your adjustments.

- Select the channel you want to adjust by clicking the Red, Green, or Blue button below the color curve   , or click the White button to adjust all RGB components simultaneously.
- Click the curve to add a control point.
- Select a control point and drag it to adjust it.
- As you adjust the controls, the waveform/histogram/vectorscope monitor and video preview will update in real time to allow you to check your adjustments. Click Delete Point  to remove the selected control point.
- Click the Reset button  at the bottom of the Inspector pane to remove all control points.

Adjusting the color correction sliders

Click the Inspector button  in the toolbar to display the Inspector pane if it isn't already visible. In the Adjust Color workspace, the Color Correction section in the Inspector pane provides Brightness, Contrast, Saturation, Lift, Gamma, and Gain sliders you can use to adjust video levels. As you adjust the controls, the waveform/histogram/vectorscope monitor and video preview will update in real time to allow you to check your adjustments.

The sliders are used to edit ASC-CDL (American Society of Cinematographers Color Decision List) parameters.

-  For precise control, you can hold Ctrl (Windows) or ⌘ (macOS) while dragging or click the numeric value to type a new value.

Drag the Brightness slider to adjust the overall lightness of your video.

Drag the Contrast slider to adjust the overall contrast of your video.

 Brightness and contrast are not saved explicitly with ASC-CDL files. When exporting an ASC-CDL file, the Brightness and Contrast settings are incorporated with the other color-correction values. When you reload an exported ASC-CDL file, the Brightness and Contrast settings will be set to 0.

When exchanging color settings with Catalyst Browse and Catalyst Prepare, click the Tools button  at the bottom of the Catalyst Browse window and choose Save preset from the menu to preserve Brightness and Contrast settings.

For more information, see ["Exporting color-correction settings" on page 111](#) and ["Applying color correction" on page 99](#).

Drag the Saturation slider to adjust the overall intensity of the color in your video.

To adjust lift, gamma, and gain, drag the R, G, B sliders to adjust the red, green, and blue components of the each parameter, or drag the Y slider to adjust luminance for all RGB components simultaneously.

 Double-click a control to reset its value.

Click the Undo  and Redo  buttons to step forward or backward through your recent edits.

Click the Reset button  at the bottom of the Inspector pane to reset all color correction.

Applying color-correction settings

You can use the Tools button  at the bottom of the Catalyst Browse window to load color presets or ASC-CDL (American Society of Cinematographers Color Decision List) files to exchange color-grading information.

 Color correction is not available when Catalyst Browse is started in view-only mode.

Applying a color preset

Color presets include the source settings (exposure, temperature, and tint), look profile, tone curve, and ASC-CDL settings. For more information, see ["Editing Color Adjustments controls" on page 87](#).

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Double-click a clip in the Media Browser to load it.

 Color correction is available only in View mode.

3. Click the Adjust Color button at the bottom of the Catalyst Browse window.
4. Click the Inspector button  in the toolbar to display the Inspector pane if it isn't already visible.
5. Click the Tools button  at the bottom of the Catalyst Browse window and choose Load preset from the menu.
6. In the Load Preset dialog, choose a Catalyst color (.ccolor) file.

 Presets are saved in the following folders by default:

Windows: C:\Users\

macOS: /Users/<user>/Documents/Sony/Catalyst/Color

7. Click Load.

The selected color settings are loaded and applied to all clips that you open.

Applying an ASC-CDL file

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Double-click a clip in the Media Browser to load it.
 Color correction is available only in View mode.
3. Click the Adjust Color button at the bottom of the Catalyst Browse window.
4. Click the Inspector button  in the toolbar to display the Inspector pane if it isn't already visible.
5. Click the Tools button  at the bottom of the Catalyst Browse window and choose Load ASC-CDL from the menu.
6. In the Load ASC-CDL dialog, choose a *.cdl file.
7. Click Load.

The selected color settings are loaded and applied to all clips that you open.

Using a Tangent control

You can use Tangent Element Tk, Kb, Bt, Mf, Vs, or Tangent Wave control panels to adjust color circles and other parameters.

-  Tangent Element panels must be connected to your computer via USB. When using Tangent Element-Vs on a tablet, your tablet and the computer running Catalyst Browse must be connected to the same network.

To enable control, Tangent Hub must be installed on the computer.

For more information about using and configuring Tangent hardware and software, please refer to the Tangent documentation.

For information about control mappings, please see the control's display or use the Tangent Mapper application.

Video-style (Rec.709) color grading

Use the following workflow when adjusting color grading for video sources.

You can use the Color Adjustments controls in the Inspector  to perform color grading that is applied globally to all clips. If you want to save your color-correction settings, you can transcode clips to create new files. For more information, see ["Saving and sharing clips" on page 119](#).

Grading with Rec.709 gamma

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Double-click a clip in the Media Browser to load it.

 Color correction is available only in View mode.

3. Click the Adjust Color button at the bottom of the Catalyst Browse window. In this mode, Catalyst Browse displays a waveform/histogram/vectorscope monitor, a video preview, and color controls that you can use to adjust the appearance of your video.

The waveform/histogram/vectorscope monitor and video preview window allow you to monitor your progress as you adjust color values. For more information, see ["Editing Color Adjustments controls" on page 87](#).

4. Click the Inspector button  in the toolbar to display the Inspector pane if it isn't already visible. In the Adjust Color workspace, the Inspector pane provides controls that you will use to adjust color-grading settings.
5. The Source drop-down list displays the color space that is applied to your source media.

Click the Unlock button  and choose a setting from the Source drop-down list to choose the color space that should be applied to the source media. When you choose a setting, the video preview is updated.

 The source color space should be detected automatically and does not need to be changed in most cases.

- Choose S-Gamut/S-Log2 for S-Log2, RAW, or X-OCN sources.
 - Choose S-Gamut3.Cine/S-Log3 or S-Gamut3/S-Log3 for S-Log3, RAW, or X-OCN sources.
6. The Working box displays the color space that should be applied to color grading adjustments. Click the Options  button and choose Rec.709 from the Working color space drop-down list to change the setting if necessary.

7. If your source video is set to S-Gamut/S-Log2, S-Gamut3.Cine/S-Log3, S-Gamut3/S-Log3, Rec.2020/S-Log3, Rec.2020/HLG, or Rec.2020/PQ, you can use the Source Settings controls to adjust the Exposure, Temperature, and Tint of your clip. For more information, see ["Editing Color Adjustments controls" on page 87](#).
8. You can use the Look controls to convert an HDR clip to Rec.709 (full). For more information, see ["Applying a look profile" on page 96](#).
9. Use the color wheels and controls in the Inspector pane to adjust your colors as needed. For more information, see ["Editing Color Adjustments controls" on page 87](#).
10. Click the Tools button  at the bottom of the Catalyst Browse window and choose Export color settings from the menu if you want to export your settings as a 3D LUT file.
 -  3D LUT export is available only when the Source drop-down list is set to an S-Log, RAW, or X-OCN format.

Grading with hypergamma conversion

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Double-click a clip in the Media Browser to load it.

 Color correction is available only in View mode.

3. Click the Adjust Color button at the bottom of the Catalyst Browse window. In this mode, Catalyst Browse displays a waveform/histogram/vectorscope monitor, a video preview, and color controls that you can use to adjust the appearance of your video.

The waveform/histogram/vectorscope monitor and video preview window allow you to monitor your progress as you adjust color values. For more information, see ["Editing Color Adjustments controls" on page 87](#).

4. Click the Inspector button  in the toolbar to display the Inspector pane if it isn't already visible. In the Adjust Color workspace, the Inspector pane provides controls that you will use to adjust color-grading settings.

5. The Source drop-down list displays the color space that is applied to your source media.

Click the Unlock button  and choose a setting from the Source drop-down list to choose the color space that should be applied to the source media. When you choose a setting, the video preview is updated.

 The source color space should be detected automatically and does not need to be changed in most cases.

- Choose S-Gamut/S-Log2 for S-Log2, RAW, or X-OCN sources.
 - Choose S-Gamut3.Cine/S-Log3 or S-Gamut3/S-Log3 for S-Log3, RAW, or X-OCN sources.
6. The Working box displays the color space that should be applied to color grading adjustments. Click the Options  button and choose Rec.709 from the Working color space drop-down list to change the setting if necessary.
 7. You can use the Look controls to choose conversion settings to 709(800), HG8009G33, or HG8009G40. For more information, see ["Applying a look profile" on page 96](#).
 8. If your source video is set to S-Gamut/S-Log2, S-Gamut3.Cine/S-Log3, S-Gamut3/S-Log3, Rec.2020/S-Log3, Rec.2020/HLG, or Rec.2020/PQ, you can use the Source Settings

controls to adjust the Exposure, Temperature, and Tint of your clip. For more information, see ["Editing Color Adjustments controls" on page 87](#).

9. Use the color wheels and controls in the Inspector pane to adjust your colors as needed. For more information, see ["Editing Color Adjustments controls" on page 87](#).
10. Click the Tools button  at the bottom of the Catalyst Browse window and choose Export color settings from the menu if you want to export your settings as a 3D LUT file. For more information, see ["Exporting color-correction settings" on page 111](#).

Log (cinematic) color grading

Use the following workflow when adjusting color grading for Log sources.

You can use the Color Adjustments controls in the Inspector  to perform color grading that is applied globally to all clips. If you want to save your color-correction settings, you can transcode clips to create new files. For more information, see ["Saving and sharing clips" on page 119](#).

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Double-click a clip in the Media Browser to load it.



Color correction is available only in View mode.

3. Click the Adjust Color button at the bottom of the Catalyst Browse window. In this mode, Catalyst Browse displays a waveform/histogram/vectorscope monitor, a video preview, and color controls that you can use to adjust the appearance of your video.

The waveform/histogram/vectorscope monitor and video preview window allow you to monitor your progress as you adjust color values. For more information, see ["Editing Color Adjustments controls" on page 87](#).

4. Click the Inspector button  in the toolbar to display the Inspector pane if it isn't already visible. In the Adjust Color workspace, the Inspector pane provides controls that you will use to adjust color-grading settings.

5. The Source drop-down list displays the color space that is applied to your source media.

Click the Unlock button  and choose a setting from the Source drop-down list to choose the color space that should be applied to the source media. When you choose a setting, the

video preview is updated.

- Choose S-Gamut/S-Log2 for S-Log2, RAW, or X-OCN sources.
 - Choose S-Gamut3.Cine/S-Log3 or S-Gamut3/S-Log3 for S-Log3, RAW, or X-OCN sources.
6. The Working box displays the color space that should be applied to color grading adjustments. Click the Options  button and choose Log from the Working color space drop-down list to change the setting if necessary.
 7. If your source video is set to S-Gamut/S-Log2, S-Gamut3.Cine/S-Log3, or S-Gamut3/S-Log3, you can use the Source Settings controls to adjust the Exposure, Temperature, and Tint of your clip. For more information, see ["Editing Color Adjustments controls" on page 87](#).
 8. Use the color wheels and controls in the Inspector pane to adjust your colors as needed. For more information, see ["Editing Color Adjustments controls" on page 87](#).
 9. You can use the Look controls to convert an HDR clip to Rec.709 (full). For more information, see ["Applying a look profile" on page 96](#).
 10. Click the Tools button  at the bottom of the Catalyst Browse window and choose Export color settings from the menu if you want to export your settings as a 3D LUT file. For more information, see ["Exporting color-correction settings" on page 111](#).

Advanced cinematic (ACES) color grading

Use the following workflow when adjusting color grading in the Academy Color Encoding System (ACES) color space.

You can use the Color Adjustments controls in the Inspector  to perform color grading that is applied globally to all clips. If you want to save your color-correction settings, you can transcode clips to create new files. For more information, see ["Saving and sharing clips" on page 119](#).

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Double-click a clip in the Media Browser to load it.

 Color correction is available only in View mode.

3. Click the Adjust Color button at the bottom of the Catalyst Browse window. In this mode, Catalyst Browse displays a waveform/histogram/vectorscope monitor, a video preview, and

color controls that you can use to adjust the appearance of your video.

The waveform/histogram/vectorscope monitor and video preview window allow you to monitor your progress as you adjust color values. For more information, see ["Editing Color Adjustments controls" on page 87](#).

4. Click the Inspector button  in the toolbar to display the Inspector pane if it isn't already visible. In the Adjust Color workspace, the Inspector pane provides controls that you will use to adjust color-grading settings.
5. The Source drop-down list displays the color space that is applied to your source media. Click the Unlock button  and choose a setting from the Source drop-down list to choose the color space that should be applied to the source media. When you choose a setting, the video preview is updated.
 - Choose S-Gamut/S-Log2 for S-Log2, RAW, or X-OCN sources.
 - Choose S-Gamut3.Cine/S-Log3 or S-Gamut3/S-Log3 for S-Log3, RAW, or X-OCN sources.
6. The Working box displays the color space that should be applied to color grading adjustments. Click the Options  button and choose ACES from the Working color space drop-down list to change the setting if necessary.
7. If your source video is set to S-Gamut/S-Log2, S-Gamut3.Cine/S-Log3, or S-Gamut3/S-Log3, you can use the Source Settings controls to adjust the Exposure, Temperature, and Tint of your clip. For more information, see ["Editing Color Adjustments controls" on page 87](#).
8. Use the color wheels and controls in the Inspector pane to adjust your colors as needed. For more information, see ["Editing Color Adjustments controls" on page 87](#).
9. Click the Tools button  at the bottom of the Catalyst Browse window and choose Export color settings from the menu if you want to export your settings as a 3D LUT file.

Output will be Rec.709 (full).

For more information, see ["Exporting color-correction settings" on page 111](#).

High Dynamic Range (HDR) color grading

Use the following workflow to adjust color grading in the Rec.2020/S-Log3 color space and then convert to high dynamic range (Rec.2020/S-Log3, Rec.2020/HLG, or Rec.2020/PQ) or standard dynamic range (Rec.2020 or Rec.709) color spaces for distribution.

You can use the Color Adjustments controls in the Inspector  to perform color grading that is applied globally to all clips. If you want to save your color-correction settings, you can transcode clips to create new files. For more information, see ["Saving and sharing clips" on page 119](#).

1. Adjust Catalyst Browse options for HDR color grading:

- a. Click the Options button  .
- b. From the Working color space drop-down list, choose Rec.2020/S-Log3 (HDR).

When you choose Rec.2020/S-Log3 from the Working color space drop-down list, you can enable the SDR gain switch to convert between standard- and high-dynamic-range content:

SDR gain

When the switch is enabled, you can drag the Gain slider to choose the gain that is applied when reading SDR content or when exporting to an SDR format or displaying on an SDR display.

For example, if you set the slider to -6.0 dB, a linear gain of +6.0 dB (2.0x) is applied when reading SDR content, and a linear gain of -6.0 dB (0.5x) is applied when exporting to an SDR format or displaying on an SDR display.

- c. From the Preview color space drop-down list, choose the color space for the Catalyst Browse video preview window.

In most cases, choose Rec.709 for your computer monitor, or you can choose other settings to check your video using scopes. For more information, see ["Loading a clip/clip list for color adjustments and configuring the waveform, histogram, and vectorscope monitors" on page 87](#).
- d. From the External monitor color space drop-down list, choose the setting that matches the EOTF (electro-optical transfer function) setting on your external monitor.

 You can use the AIR Matching (Artistic Intent Rendering) or bypass OOTF settings to achieve a consistent look between external-monitor previews and rendered clips.

Using AIR Matching to monitor using the S-Log3 (Live HDR) EOTF

Sony BVM-X300 version 2.0 monitor settings:

- Color Space: ITU-R BT.2020
- EOTF: S-Log3 (Live HDR)
- Transfer Matrix: ITU-R BT.2020
- In the Catalyst Browse Options menu, choose Rec.2020/S-Log3 from the External monitor color space drop-down list.

Content mastered using these settings and rendered to HLG or PQ with AIR Matching should have the same look on HLG or PQ monitors or televisions.

Using bypass OOTF to monitor using the S-Log3 (HDR) EOTF

Sony BVM-X300 version 2.0 monitor settings:

- Color Space: ITU-R BT.2020
- EOTF: S-Log3 (HDR)
- Transfer Matrix: ITU-R BT.2020
- In the Catalyst Browse Options menu, choose Rec.2020/S-Log3 from the External monitor color space drop-down list.

Content mastered using these settings and rendered to HLG or PQ with bypass OOTF should have the same look on HLG or PQ monitors or televisions.

Converting HDR media to SDR color spaces

When converting HDR media to standard dynamic range color spaces, use the following settings to preserve your Rec.2020/S-Log3 grading (the dynamic range of the HDR color space will be clamped to the BT.709 gamma curve):



- In Options, set the Working color space to Rec.2020/S-Log3 (HDR).
- In Options, enable the SDR gain switch and adjust the control to choose the gain curve that will be applied when exporting to an SDR format or displaying on an SDR display.
- In Options, set the Preview color space for the video preview to Rec.709 or Rec.2020.

When converting HDR media to standard dynamic range color spaces, use the following settings to preserve more of the dynamic range of the original HDR media:

- In Options, set the Working color space to Rec. 709.
 - In the Inspector, set the Convert to color space to 709(800), HG8009G33, or HG8009G40.
- e. From the External monitor device drop-down list, choose the device where you've connected a monitor that supports the Rec.2020 color gamut and an HDR luminance curve, such as the Sony BVM-X300.
 - f. From the Monitor resolution drop-down list, choose the appropriate resolution for your external monitor.
2. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
 3. Double-click a clip in the Media Browser to load it.



Color correction is available only in View mode.

4. Click the Adjust Color button at the bottom of the Catalyst Browse window. In this mode, Catalyst Browse displays a waveform/histogram/vectorscope monitor, a video preview, and color controls that you can use to adjust the appearance of your video.

The waveform/histogram/vectorscope monitor and video preview window allow you to monitor your progress as you adjust color values. For more information, see ["Editing Color Adjustments controls" on page 87](#).

5. Click the Inspector button  in the toolbar to display the Inspector pane if it isn't already visible. In the Adjust Color workspace, the Inspector pane provides controls that you will use to adjust color-grading settings.

6. Use the color wheels and controls in the Inspector pane to adjust your colors as needed. For more information, see ["Editing Color Adjustments controls" on page 87.](#)

7. Click the Tools button  at the bottom of the Catalyst Browse window and choose Export color settings from the menu if you want to export your settings as a 3D LUT file.

For more information, see ["Exporting color-correction settings" on page 111.](#)

Exporting color-correction settings

You can use the Tools button  at the bottom of the Catalyst Browse window to export color-correction settings to cameras for on-set monitoring or to a nonlinear editor (NLE) for color grading.

 Color correction is not available when Catalyst Browse is started in view-only mode.

Saving a color preset

Color presets include the source settings (exposure, temperature, and tint), look profile, tone curve, and ASC-CDL settings. For more information, see ["Editing Color Adjustments controls" on page 87.](#)

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.

2. Double-click a clip in the Media Browser to load it.

 Color correction is available only in View mode.

3. Click the Adjust Color button at the bottom of the Catalyst Browse window.

4. Click the Inspector button  in the toolbar to display the Inspector pane if it isn't already visible.

5. Click the Tools button  at the bottom of the Catalyst Browse window and choose Save preset from the menu.

6. In the Save Preset dialog, type a file name to identify your Catalyst color (.color) file.

 Presets are saved in the following folders by default:

Windows: C:\Users\\Documents\Sony\Catalyst\Color\

macOS: /Users/<user>/Documents/Sony/Catalyst/Color

7. Click OK.

Exporting an ASC-CDL file

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.
2. Double-click a clip in the Media Browser to load it.

 Color correction is available only in View mode.

3. Click the Adjust Color button at the bottom of the Catalyst Browse window. In this mode, Catalyst Browse displays a waveform/histogram/vectorscope monitor, a video preview, and color controls that you can use to adjust the appearance of your video.
4. Click the Inspector button  in the toolbar to display the Inspector pane if it isn't already visible and adjust your color settings as needed. For more information, see ["Editing Color Adjustments controls" on page 87](#).

 Saturation and color wheel/slider settings are saved with ASC-CDL files. Tone curve settings are not saved.

 Brightness and contrast are not saved explicitly with ASC-CDL files. When exporting an ASC-CDL file, the Brightness and Contrast settings are incorporated with the other color-correction values. When you reload an exported ASC-CDL file, the Brightness and Contrast settings will be set to 0.

When exchanging color settings with Catalyst Browse and Catalyst Prepare, click the Tools button  at the bottom of the Catalyst Browse window and choose Save preset from the menu to preserve Brightness and Contrast settings.

For more information, see ["Exporting color-correction settings" on page 111](#) and ["Applying color correction" on page 99](#).

5. Click the Tools button  at the bottom of the Catalyst Browse window and choose Export color settings from the menu.
6. Use the Export As dialog box to specify the folder, file name, and settings you want to export:

- a. Use the browser to select the folder where you want to save your file.
 - b. In the File name box, type the path and file name you want to save your color-correction settings.
 - c. Choose ASC-CDL from the Format drop-down list.
7. Click Export.

Exporting a 3D LUT

When the Working color space in Options is set to Rec.2020/S-Log3 (HDR), you can export a 3D LUT (look-up table) to capture your color settings – including the application of SR Live metadata – that can be applied in nonlinear editing software or a hardware LUT box.

1. Click the Media Browser button at the top of the Catalyst Browse window to view the Media Browser.

2. Double-click a clip in the Media Browser to load it.

 Color correction is available only in View mode.

3. Click the Adjust Color button at the bottom of the Catalyst Browse window. In this mode, Catalyst Browse displays a waveform/histogram/vectorscope monitor, a video preview, and color controls that you can use to adjust the appearance of your video.

4. Click the Inspector button  in the toolbar to display the Inspector pane if it isn't already visible and adjust your color settings as needed. For more information, see ["Editing Color Adjustments controls" on page 87](#).

5. Click the Tools button  at the bottom of the Catalyst Browse window and choose Export color settings from the menu.

6. Use the Export As dialog box to specify the folder, file name, and settings you want to export:

- a. Use the browser to select the folder where you want to save your file.

- b. In the File name box, type the file name you want to use to save your 3D LUT.

 When SR Live metadata source is set to External file in Options, the base name of the selected SRM file is provided by default. For more information, see ["SR Live for HDR settings" on page 140](#).

- c. Choose a setting from the Format drop-down list to choose the type of 3D LUT you want to create:

- Choose 3D LUT (NLE .cube) to create a 3D LUT you can use with an NLE such as Blackmagic Design DaVinci Resolve or Adobe Premiere Pro. For more information, see ["Applying a 3D LUT in Adobe Premiere Pro" on page 118](#) or ["Applying a 3D LUT in Blackmagic Design DaVinci Resolve" on](#)

[page 117.](#)

- Choose 3D LUT (SDI/SMPTE .cube) to create a 3D LUT you can use with a hardware LUT box.
- d. If the input color space is S-Log2 or S-Log3 and the Format is set to 3D LUT (NLE .cube), you can select the Extended S-Log input range check box and choose a setting from the Type drop-down list to specify an extended input range.
- Choose IRIDAS/Adobe to create a 3D LUT you can use with Adobe Premiere Pro.
 - Choose DaVinci Resolve to create a 3D LUT you can use with DaVinci Resolve.



The Extended S-Log input range check box is used to correct for cases where an NLE treats files that use full range (such as S-Log3) as legal range. If the NLE has an input range setting, such as newer versions of Resolve, you do not need to select the Extended S-Log input range check box.

- e. Choose a setting from the Input color space drop-down list to specify the color space that will be used as the input of the LUT.
- f. Choose a setting from the Output color space drop-down list to specify the color space that will be used as the output of the LUT.



Output color space is available only when the Working color space is set to Rec.2020/S-Log3 (HDR). For more information, see "[Applying color correction](#)" on page 107.

- g. Choose a setting from the Precision drop-down list box to choose a standard (33x33x33) or high-precision (65x65x65) LUT.
- h. Select the Source settings check box if you want to include exposure, temperature, and tint settings with your LUT.
- i. Select the Convert to setting check box if you want to export your LUT using the Hypergamma setting selected in the Convert to drop-down list in the Inspector.



The Convert to setting check box is available only when the Working color space in Options is set to Rec.709 and the Convert to drop-down in the Inspector pane is set to a Hypergamma conversion choice, such as 709(800) or HG8009G33.

- j. Select the Look profile check box if you want to include the selected look profile from the Inspector in your LUT.

 The Look profile check box is displayed below the Convert to drop-down list when the Working color space in Options is set to Rec.709 and the Convert to drop-down in the Inspector pane is not set to a Hypergamma conversion choice.

The Look profile check box is displayed below the Color correction check box when the Working color space in Options is set to Log.

- k. Select the Tone curve check box if you want to include the tone curve from the Inspector in your LUT.
 - l. Select the Color correction check box if you want to include the color correction adjustments from the Inspector in your LUT.
7. Click Export. The LUT file will be saved in the folder you selected in step 6a.

Applying a 3D LUT in Blackmagic Design DaVinci Resolve

1. Follow the instructions in ["Exporting a 3D LUT" on page 114](#) to save your 3D LUT file in 3D LUT (NLE .cube) format.
 2. Save the 3D LUT file in the following folder:
 - Windows: C:\ProgramData\Blackmagic Design\DaVinci Resolve\Support\LUT\Sony
 - macOS: /macOS/Library/Application Support/Blackmagic Design/DaVinci Resolve/LUT/Sony
-  **Tips:**
- To locate the LUT folder, choose File > Project Settings in Resolve, and then click the Open LUT Folder button on the Color Management tab.
 - Use the 3D Lookup Table Interpolation drop-down list to set 3D LUT interpolation to be Trilinear or Tetrahedral.
3. Ensure your project is set to use the intended output color space (typically Rec.709) on the timeline:
 - a. In Resolve, choose File > Project Settings.
 - b. Click the Color Management tab.
 - c. From the Color science drop-down list, choose DaVinci YRGB.
 - d. From the Timeline color space drop-down list, choose a Rec.709 color space, such as Rec.709 (Scene).
 - e. Click Save.
 4. To apply the LUT to a clip, right-click the media thumbnail, choose LUT from the shortcut menu, choose Sony, and then choose the 3D LUT you want to use:

If the source media color space uses Legal range (such as HLG XAVC), no further actions are required.

If the source media color space uses Full range (such as S-Log3, for example), you must tell Resolve not to stretch the media range: right-click the media thumbnail, choose Clip Attributes, and then change Data Levels to Full.

Applying a 3D LUT in Adobe Premiere Pro

1. Follow the instructions in ["Exporting a 3D LUT" on page 114](#) to save your 3D LUT file in 3D LUT (NLE .cube) format.
2. Ensure your sequence is set to use the intended output color space (typically Rec.709) as its working color space.
 - a. In Premiere Pro, choose Sequence > Sequence Settings.
 - b. From the Working Color Space drop-down list, choose Rec.709.
 - c. Click OK.
3. Right-click the media in the Premiere Pro media window, choose Modify from the shortcut menu, and then choose Interpret Footage.

 When working with S-Log3 and/or HLG files containing SR Live metadata in Premiere Pro 2022, you can skip steps 3-6 if you want to convert from S-Log3/HLG to Rec.709. If you want to use a specific 3D LUT in Premiere Pro 2022, please perform steps 3-6 and refer to the Premiere Pro documentation for specific usage information.

4. In the Color Management section, open the Input LUT selector.
5. Select the 3D LUT file you want to use:
 - To use an existing 3D LUT, choose it from the selector.
 - To add a new 3D LUT, choose Add LUTs and browse to the folder where you've saved the 3D LUT you want to use.
6. Set the Color Space Override selector to match the output color space of the LUT (typically Rec.709).

Saving and sharing clips

Catalyst Browse allows you to convert clips to another format or copy them in their source format.

Working with FTP devices

You can use Catalyst Browse to work with clips on a remote server using FTP/FTPS.


Connect to an FTP device

Click the Tools button  at the top of the Places pane and choose Add remote server to specify a server's connection settings.


Item	Description
Server name	Type a name to identify the server. This name will be displayed in the Remote Devices list in the Places pane.
Protocol	Choose a setting from the drop-down list to indicate whether you'll connect to the server via an FTP or FTPS (Explicit) connection.
Address/Port	Type the address or host name of the server and the port.
Folder	If you want to connect to a specific folder on the server, type its name here. Leave this box blank to connect to the root of the device.
User name	Type the user name that you want to use to connect to the server.
Password	Type the password for the specified user name.

Disconnecting from or reconnecting to a server

To disconnect from a server, select the server in the Places pane and click the  button:

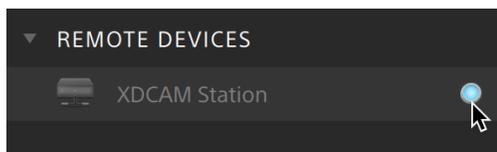

To reconnect to a server, select the server in the Places pane and click the button:

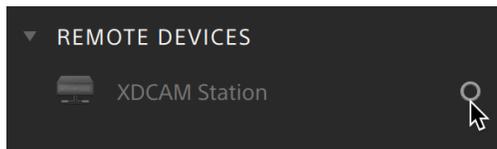

Editing a server's settings


To edit the settings for a connected server, select it and then click the Tools button at the top of the Places pane and choose Edit remote server.

Removing a server

To remove a remote server from the Remote Devices list, select it and then click the Tools button at the top of the Places pane and choose Remove remote server.

Browsing the contents of an FTP device

1. Connect to the FTP device. For more information, see ["Connect to an FTP device" on page 119](#).
2. In the Places pane, select your FTP device. The contents of the device are displayed in the center pane.

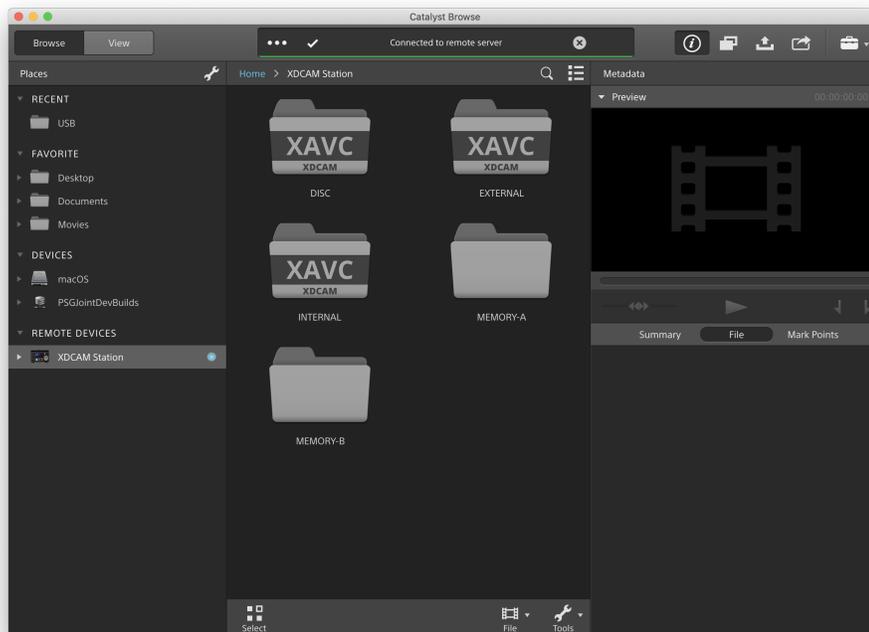


3. In the center pane, select a clip.
 - You can use the Inspector pane to view the selected clip's metadata. For more information, see ["Viewing and editing metadata" on page 67](#).

 Audio and video preview are not available over FTP connections.

- Right-click the selected clip and choose Rename to edit the clip's name.
- Right-click the selected clip and choose Delete to remove the selected clip from the device.


 Copying, renaming, or deleting clip lists to SxS media and USB storage on the PZW-4000 is not supported.

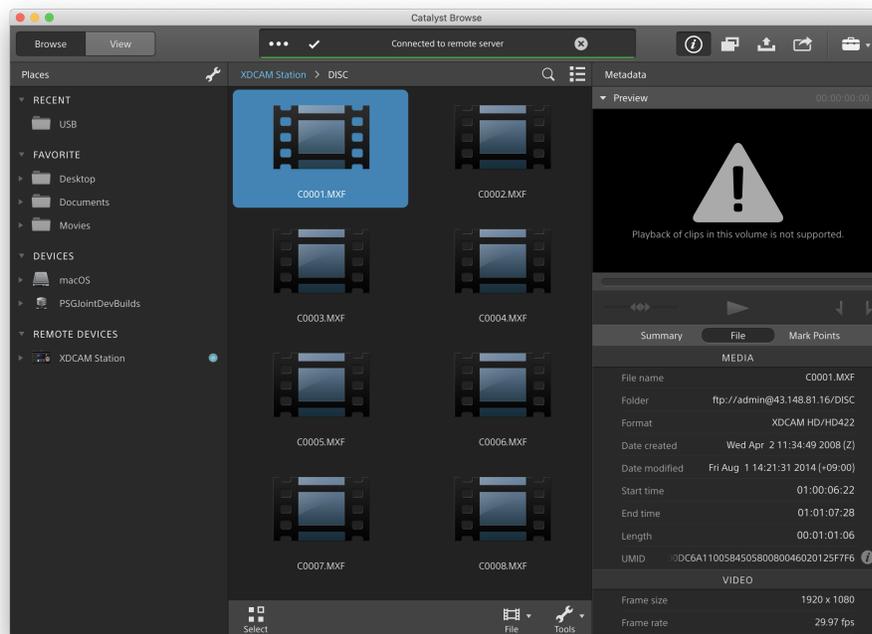

Copying clips from an FTP device to your computer


Working with clips from an FTP server is as simple as working with clips from your local computer or an external drive. After you connect to an FTP device, it will be displayed in a Remote Devices list in the Places pane, and you can browse it in the same way you browse other volumes.

1. Connect to the FTP device. For more information, see ["Connect to an FTP device" on page 119](#).
2. In the Places pane, select your FTP device. The contents of the device are displayed in the center pane.

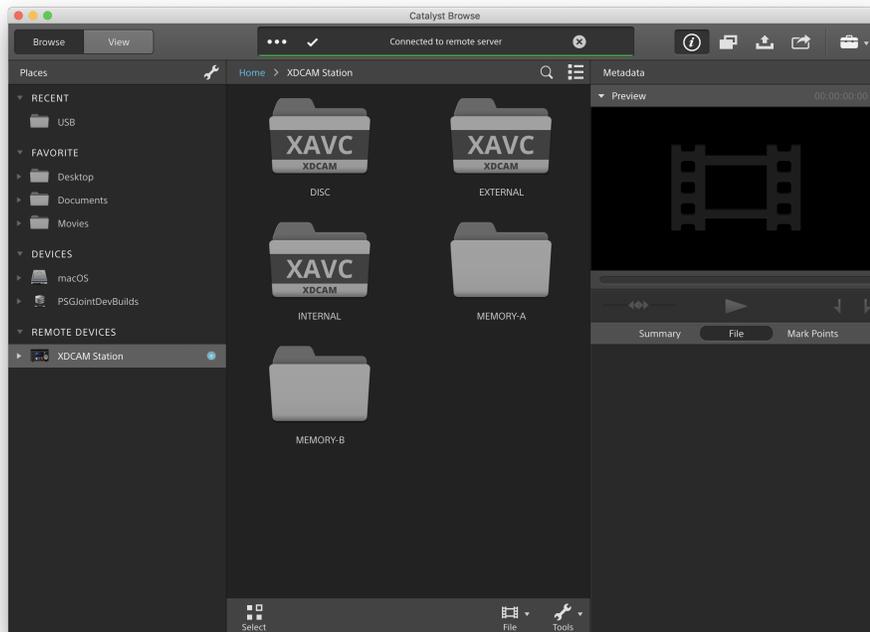

3. In the center pane, select the clip you want to copy to your library computer.

 Audio and video preview are not available over FTP connections.

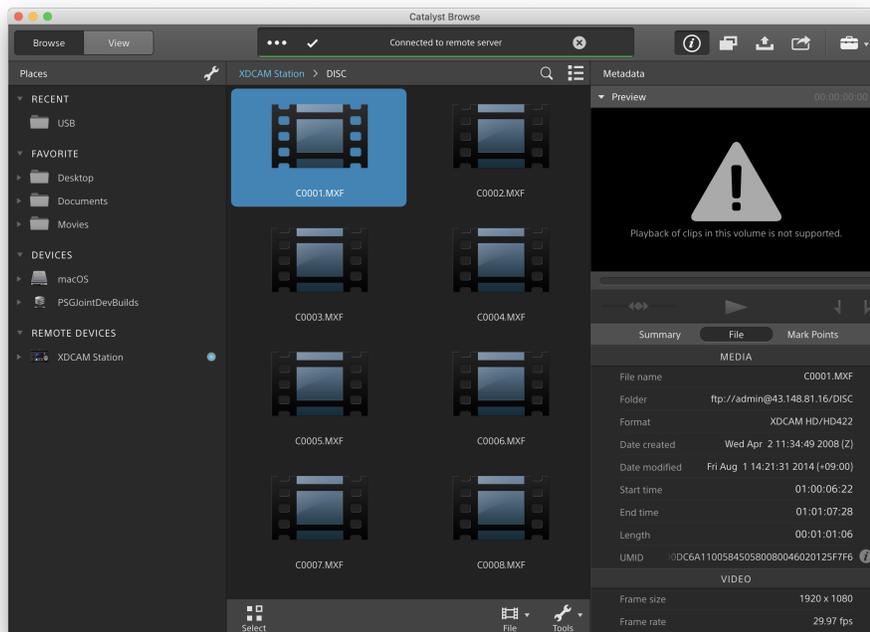

4. Click the Copy button  at the top of the Catalyst Browse window.

5. Use the Copy pane to choose a destination for your files.

Choose a folder from the Copy files to drop-down list or choose Browse to browse to another folder.


6. Use the copy pane to choose copy options, and then click the Copy button to start copying.

For more information about the controls in the Copy pane, please see ["Copying clips" on page 131](#).

Copy clips to a Sony FTP device


1. Connect to the FTP device where you want to copy the clips. If your source clips are also on an FTP device, also connect to the source FTP device. For more information, see ["Connect to an FTP device" on page 119](#).

2. In the Places pane, select the source device from which you want to copy clips. The contents of the device are displayed in the center pane.

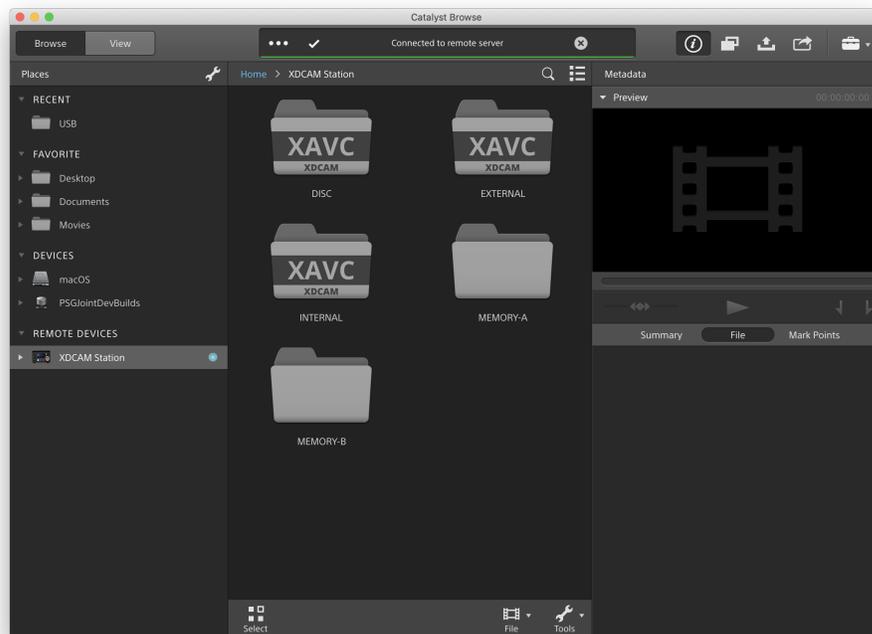

3. In the center pane, select the clip you want to copy to your library computer.

 Audio and video preview are not available over FTP connections.

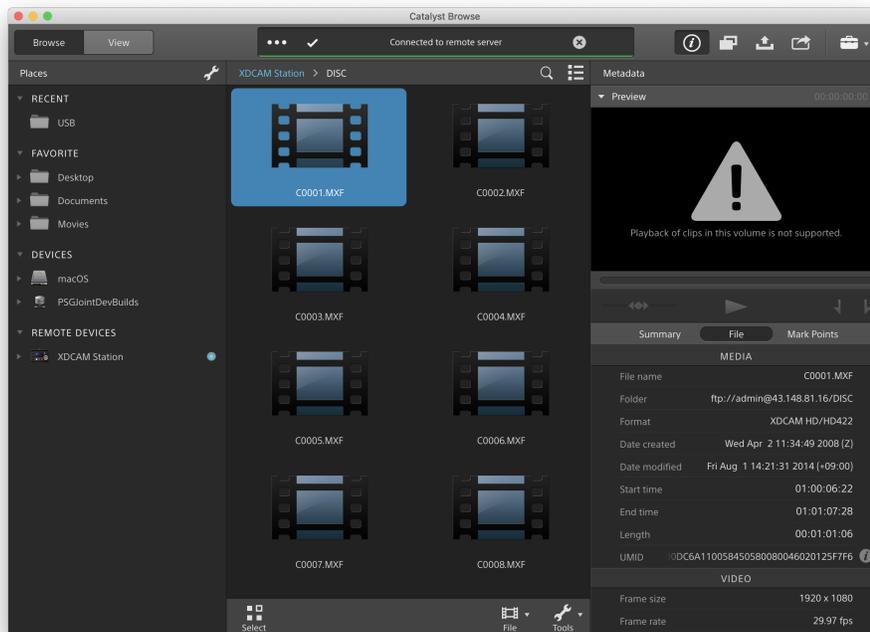

4. Click the Copy button  at the top of the Catalyst Browse window.
5. Use the Copy pane to choose a destination for your files.
Choose the destination FTP device from the Copy files to drop-down list.
6. Use the copy pane to choose copy options, and then click the Copy button to start copying.

For more information about the controls in the Copy pane, please see ["Copying clips" on page 131](#).

 Notes:


The Use fast device-to-device copy check box is only available when copying between Sony devices via FTP (FTPS protocol is not supported).

Copy clips to a non-Sony FTP device

1. Connect to the FTP device where you want to copy the clips. If your source clips are also on an FTP device, also connect to the source FTP device. For more information, see

"Connect to an FTP device" on page 119.

2. In the Places pane, select the source device from which you want to copy clips. The contents of the device are displayed in the center pane.

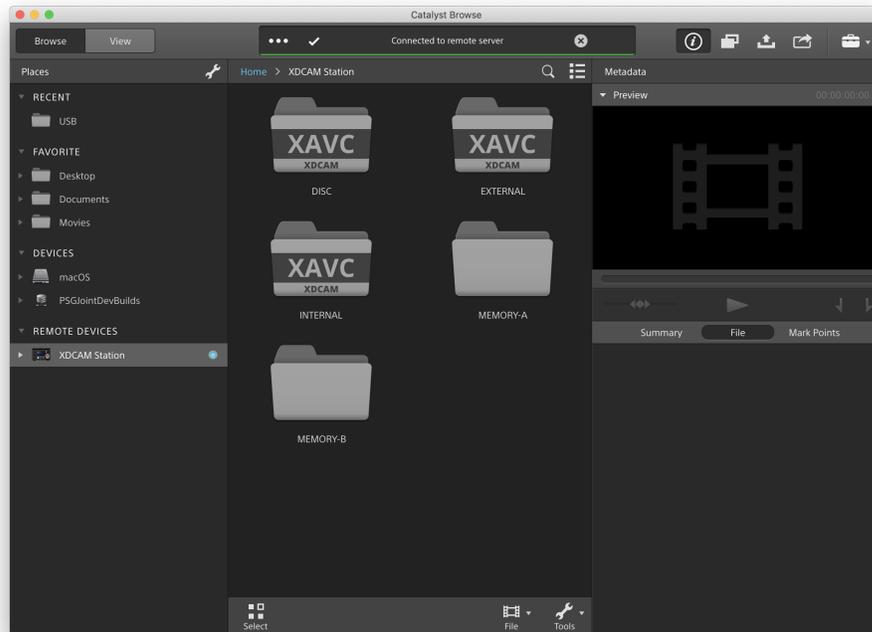


The source must be a Sony device.

3. In the center pane, select the clip you want to copy to your library computer.



Audio and video preview are not available over FTP connections.

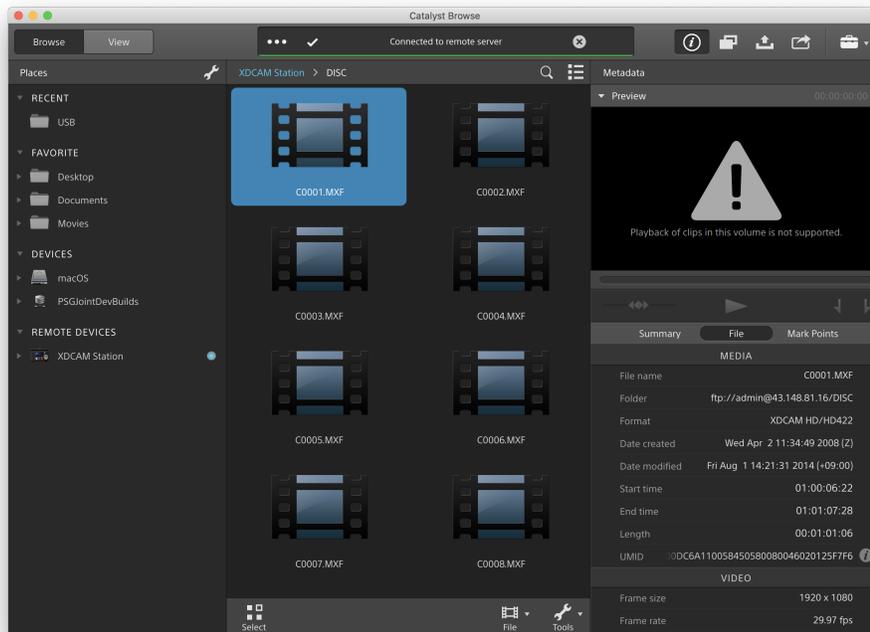

4. Click the Copy button  at the top of the Catalyst Browse window.
5. Use the Copy pane to choose a destination for your files.
Choose the destination FTP device from the Copy files to drop-down list.
6. Use the copy pane to choose copy options, and then click the Copy button to start copying.

For more information about the controls in the Copy pane, please see ["Copying clips" on page 131](#).

Notes:

The Use fast device-to-device copy check box is only available when copying from a Sony device using FTP protocol (FTPS protocol is not supported).

Transcoding clips

Transcoding clips allows you to convert clips to another format. The original clips are not affected (overwritten, deleted, or altered) during the exporting process.

1. Select the clips you want to export in Media Browser or Edit mode.

The left pane allows you to navigate the folders, and the middle pane displays the contents of the selected folder

- Click a file to select it.
- Hold Shift and click the first and last file you want to select to select a range of files.
- Hold Ctrl (Windows) or ⌘ (macOS) to select multiple files.

 Click the Select button  to select multiple files without using keyboard modifiers.

 When transcoding multiple files, all files must use the same source settings.

 An  on a thumbnail indicates a clip that spans multiple files due to file-size limitations but is displayed in Catalyst Browse as a single virtual clip. Spanned XDCAM EX clips can be transcoded directly, but AVCHD clips must be copied first.

To transcode spanned AVCHD clips, first copy them to a new folder. After the copy is complete, the  indicator is removed, and the clips are combined in a new clip that you can transcode. For more information, see "[Transcoding clips](#)" on page 126.

2. Click the Export button  at the top of the Catalyst Browse window, and use the Export pane to choose a destination and format for your exported files.
3. The Export clips to box displays the path to the folder where the selected files will be exported. You can type a path in the box or click the Browse button to choose a folder.
4. If you want to rename files, select the Rename files check box. Renaming ensures that source files will not be overwritten.
 - Type a string in the Prefix box if you want to start all file names with the same text.
 - Choose a setting from the Numbering drop-down list to indicate whether you want to number clips or use their original file names.
 - Type a string in the Suffix box if you want to end all file names with the same text.

For example, if you wanted to name clips using a convention such as `Commercial_001_Camera1.mxf`, you would type `Commercial_` in the Prefix box, choose 3 digits from the Numbering drop-down list, and type `_Camera1` in the Suffix box.

 If you're exporting a still-image sequence for use in an editor that has specific file-naming requirements, you can use the Rename files controls to ensure your exported files are compliant with your editor's requirements.

5. The Source Metadata section shows you the file name, color space format, frame size, and frame rate of the selected clip.

 Source metadata is not displayed when a clip list is selected.

 Click the Reset button  in the Source Metadata heading in the Inspector pane to reset the Color Space based on the clip's metadata.

6. Use the Transcode Settings section to choose the format for your exported files. If you need to reset the transcode settings to their default values, click the Reset button .

- a. When exporting to a video format, choose a setting from the Output color space drop-down list to choose the color space that will be used for rendering the new files.

You can choose Same as preview or Same as external monitor (if an external monitor is enabled) to match the output color space and color adjustments to your video preview or external monitor setting. For more information, see "[Editing Catalyst Browse options](#)" on page 135.

 If the selected color space includes color adjustments, the color adjustments icon  is displayed in white and a ToolTip notifies you that color adjustments will be included. If the selected color space does not include color adjustments, the color adjustments icon  is displayed in gray and a ToolTip notifies you that color adjustments will be excluded.

If the selected output color space is not compatible with the source color space, a warning is displayed to notify you that the clip cannot be exported using the current settings.

- b. Choose a setting from the Format drop-down list to indicate the file format you want to use for your exported files.

 Format settings that are not supported by the selected Output color space will not be available.

 When transcoding to DPX format, you can type a value in the Starting frame index box to append a numeric index to transcoded file names.

OpenEXR is available only for S-Gamut, RAW, or X-OCN sources when Output color space is set to ACES, Rec.2020/Linear, S-Gamut/Linear or S-Gamut3/Linear.

ProRes is available on macOS only.

- c. Choose a setting from the Frame size drop-down list to choose the dimensions of the rendered frame, or choose Same as source to match the selected clip.

- d. Choose a setting from the Frame rate drop-down list to choose the number of frames per second for the rendered clip, or choose Same as source to match the selected clip.

- e. Choose a setting from the Render preset drop-down list to choose the settings that will be used for the exported files.

 Choose the Best match preset if you want Catalyst Browse to choose the most appropriate preset for each selected clip.

 Render preset settings that are not supported by the selected Output color space and Format will not be available.

- f. If you want to create a file with segmented body partitions from a single body partition, select the Create Sony Professional Disc partitions or Create segmented body partitions check box. When the check box is cleared, body partitions are not modified.

 The Create Sony Professional Disc partitions check box is available only when XDCAM is selected in the Format drop-down list. Create segmented body partitions is available only when XAVC Intra or XAVC Long is selected in the Format drop-down list.

 Files created with segmented body partitions may not be recognized properly by some Sony camcorders, decks, or servers.

7. Enable the Use advanced settings switch if you need to adjust additional transcoding settings.
 - a. Choose a setting from the Crop type drop-down list to choose the aspect ratio for your transcoded file:
 - None (letterbox/pillarbox): if the source frame is wider than the destination frame, black bars are displayed at the top and bottom (letterbox). If the source frame is narrower than the destination frame, black bars are displayed on the sides of the frame (pillarbox).
 - Center crop (cut edges): if the source frame does not match the output frame, the frame is centered, and the edges are cropped as needed.
 - Use masking ratio: crops the frame to the masking ratio selected in the Clip Settings menu. For more information, see ["Playing media" on page 64](#).
 - b. Choose a setting from the Encode mode drop-down list to choose whether you want to optimize image quality or transcoding speed.
 - c. Select the Use flip, rotate, and desqueeze settings check box if you're working with rotated video or video that was filmed with an anamorphic lens and want to preserve the Flip horizontal, Flip vertical, rotation, and Anamorphic desqueeze settings when transcoding. When the check box is not selected, letterboxing will be applied.

For more information, see ["Playing media" on page 64](#).
 - d. Select the Repair flash bands automatically check box if want to automatically detect and repair flash bands when transcoding.

For more information, see ["Repairing flash bands" on page 83](#).
 - e. Select the Use mark in/out points check box if you want to transcode only the portion of the video between the mark in and mark out points. For more information, see ["Marking in and out points for playback" on page 61](#).
 - f. Select the Add padding to clips check box and type a number in the Seconds box if you want to preserve media before the mark in/mark out points.
8. Click Export.

Progress is displayed in the activity pane at the top of the Catalyst Browse window. Each export job can contain multiple files if you have multiple files selected in step 2 above. If you have multiple export jobs queued, a separate progress indicator is displayed for each job.

Copying clips

Copying media allows you to import clips from cameras or decks to your computer, to another camera or deck, or to a centralized storage device.

 You can drag a clip to a folder on a drive or device in the Places pane to copy the entire clip (with no transcoding, color correction, or renaming).

1. Select the clips you want to copy in Media Browser or Edit mode.

The left pane allows you to navigate the folders on your computer, and the middle pane displays the contents of the selected folder

- Click a file to select it.
- Hold Shift and click the first and last file you want to select to select a range of files.
- Hold Ctrl (Windows) or ⌘ (macOS) to select multiple files.

 Click the Select button  to select multiple files without using keyboard modifiers.

 An  on a thumbnail indicates a clip that spans multiple files due to file-size limitations but is displayed in Catalyst Browse as a single virtual clip. After you copy a spanned AVCHD clip, the  indicator is removed, and the clips are combined in a new clip that you can transcode. For more information, see ["Transcoding clips" on page 126](#).

2. Click the Copy button  at the top of the Catalyst Browse window.
3. Use the Copy pane to choose a destination for your files.
 - a. The Copy files to box displays the path to the folder where the selected files will be copied. You can type a path in the box or choose Browse from the drop-down list to choose a folder.

 Click **Go to folder**  to swap the source and destination folders: the Copy files to folder will be displayed in the Media Browser, and the previous Media Browser folder will be used in the Copy files to box.

Copying to an AVCHD folder structure is not supported.

- b. Select the Copy all related media radio button if you want to copy all media related to the selected clips (metadata, proxy clips, and extra files).

 Only the Copy all related media option is available when the destination volume is a Sony device.

 If you need to copy all files from a volume, you can use the Back Up Source command in Catalyst Prepare. For more information, please see "[Backing up a volume](#)" in Catalyst Prepare .

 For more information about working with FTP devices, please see "[Working with FTP devices](#)" on page 119.

- c. Select the Copy proxy only radio button if you want to copy only proxy-resolution clips and all media related to the selected clips (metadata, proxy clips, and extra files).

 When you edit the metadata for a proxy file, the metadata for the full-resolution clip is updated when you copy the proxy clip back to the device. For more information, see "[Viewing and editing metadata](#)" on page 67.

- d. Select the Copy only between mark points check box if you want to copy only the media between the in and out points when copying files. For more information, see "[Marking in and out points for playback](#)" on page 61.

 The Copy only between mark points check box is available only when copying MXF clips

 Copy only between mark points is not available when copying to or from an FTP device.

- e. If you want to create a file with segmented body partitions from a single body partition, select the Create Sony Professional Disc partitions or Create segmented body partitions check box. When the check box is cleared, body partitions are not modified.

 The Create Sony Professional Disc partitions / Create segmented body partitions check box is not available during FTP copy.

 Files created with segmented body partitions may not be recognized properly by some Sony camcorders, decks, or servers.

- f. Select the Use fast device-to-device copy check box if you want to copy clips directly between Sony devices via FTP (FTPS protocol is not supported).

When this check box is selected, clips are copied directly between the devices without copying to your computer.

 Device access is not available during a fast device-to-device copy:

- Copy progress is not displayed.
 - Device-to-device copy operations cannot be canceled.
- g. Select the Preserve source UMID check box if you want to preserve a clip's UMID (Unique Material Identifier) when copying it to an FTP device. When the check box is cleared, the clip's UMID may be changed when it is copied to the device.

 The Preserve source UMID check box is available when copying from a local drive to a Sony FTP device.

4. Click Copy.

Progress is displayed in the activity pane at the top of the Catalyst Browse window. Each copy job can contain multiple files if you have multiple files selected in step 2 above. If you have multiple jobs queued, a separate progress indicator is displayed for each job.

Uploading files to Ci Workspace

1. Select the files you want to upload in Media Browser or Edit mode.
2. Click the Share button  at the top of the Catalyst Browse window.
3. From the Upload clip to drop-down list, choose Ci Workspace.
4. Use the Share pane to log on to your Ci account and follow the on-screen instructions to upload the selected files to your Ci workspace.

Choose a setting from the Login method drop-down list to choose whether you want to log in with a username/email or a Contributor Code.



If your account has multiple workspaces available, you can use the Workspace drop-down to choose the workspace that will be used by default.

5. Select the Upload original clips radio button if you want to upload the source clips, or select Transcode clips before upload and choose your transcoding settings if you want to convert the clips to another format before uploading.
 - When you upload the original clips, the source format is preserved, and no color adjustments are applied.
 - When you transcode before uploading, you can choose file format and color-adjustment settings for the uploaded files. For more information about the controls, please see ["Transcoding clips" on page 126](#).
6. Click Upload.

Progress is displayed in the activity pane at the top of the Catalyst Browse window. If you have multiple upload jobs queued, a separate progress indicator is displayed for each job.

Editing Catalyst Browse options

Click the Options  button to edit your application options.

 If you need to reset all Catalyst Browse options to their default values, hold Control + Shift when starting the application.

Application settings

Choosing a video processing device

Choose a setting from the Video processing device drop-down list to enable or bypass GPU-accelerated video playback and transcoding.

Choose CPU if you want to turn off GPU acceleration, or choose a device from the list to enable GPU-accelerated playback.

 The optimal GPU device is automatically selected. Changing this value is intended for advanced users and may be useful for troubleshooting technical problems.

 Computers equipped with CPUs that utilize Intel's Quick Sync Video (QSV) technology see improved processing performance for decoding H.264/AVC/MPEG-4 video files.

Enabling OpenCL/OpenGL interoperability

OpenCL/OpenGL interoperability allows OpenCL and OpenGL to share rendered frames and can improve playback performance, but it can cause instability with some hardware and drivers.

- Select Performance to enable OpenCL and OpenGL interoperability. We recommend using this setting in most cases for optimum playback performance.
- Select Compatibility to turn off interoperability if you notice artifacts or corruption in rendered frames.

 After changing the OpenCL/OpenGL interoperability setting, please restart Catalyst Browse for the change to take effect.

Enabling the secondary window

Enable the Secondary preview window switch if you want to show the video preview in a secondary window that you can position anywhere on your screen or on a secondary monitor.

Enable proxy clip playback

Enable the Preview using proxy clips switch if you want to use proxy clips for playback if they are available.

If you're working on a system with limited processing power, creating a proxy file will allow you to preview your media more efficiently.



Video proxy files are used for playback only.

Enable half-step timecode for 50p/60p sources

Enable the 50p/60p half-step timecode display switch if you want to display half-step timecode for each field in 50p/60p sources. The timecode for field two will be displayed with an asterisk appended:

Field 1: 01:00:17:17

Field 2: 01:00:17:17*

Show or hide thumbnail frames

Enable the Show thumbnails switch if you want to display thumbnail images in the Media Browser. Turning off the switch can improve performance on some slower storage devices.

Automatically rotate thumbnail frames

Enable the Automatically rotate thumbnails switch to detect clip rotation and adjust thumbnail images in Media Browser mode.

For more information, see ["Working with clips" on page 84](#).

Choosing snapshot settings

The Save snapshots to box displays the path to the folder where the files will be saved when you save a snapshot of the current frame. You can type a path in the box or click the Browse button to choose a folder.

Choose a setting from the Snapshot image format drop-down list to choose the file format that will be used for snapshots.

For more information, see ["Creating a snapshot of a frame" on page 62.](#)

Color management settings

Working color space

Choose a setting from the Working color space drop-down list to choose the color space that will be used for color grading.

For more information, see ["Applying color correction" on page 87.](#)

When you choose Rec.2020/S-Log3 from the Working color space drop-down list, you can enable the SDR gain switch to convert between standard- and high-dynamic-range content. For more information, see ["SR Live for HDR settings" on page 140.](#)

Video preview color space

From the Preview color space drop-down list, choose the color space for the Catalyst Browse video preview window.

In most cases, choose Rec.709 for your computer monitor, or you can choose other settings to check your video using scopes. For more information, see ["Loading a clip/clip list for color adjustments and configuring the waveform, histogram, and vectorscope monitors" on page 87.](#)

For more information, see ["Applying color correction" on page 87.](#)

External monitor color space

Choose a setting from the External monitor color space drop-down list to choose the color space that matches the EOTF (electro-optical transfer function) setting on your external monitor.

When using the Sony BVM-X300 version 2.0, please use the following monitor settings:

External monitor color space in Catalyst Browse	Color Space	EOTF	Transfer Matrix
Rec.709	ITU-R BT.709	i.e. 2.4	ITU-R BT.709

External monitor color space in Catalyst Browse	Color Space	EOTF	Transfer Matrix
Rec.2020	ITU-R BT.2020	i.e. 2.4	ITU-R BT.2020
Rec.2020/S-Log-3	ITU-R BT.2020	S-Log3(Live HDR) or S-Log3 (HDR)	ITU-R BT.2020
Rec.2020/HLG, Rec.2020/HLG AIR Matching, or Rec.2020/HLG (bypass OOTF)	ITU-R BT.2020	HLG SG Variable(HDR), HLG System Gamma 1.2	ITU-R BT.2020
Rec.2020/PQ, Rec.2020/PQ AIR Matching, or Rec.2020/PQ (bypass OOTF)	ITU-R BT.2020	SMPTE ST 2084(HDR)	ITU-R BT.2020



When Rec.2020/S-Log3 (HDR) is selected from the Working color space drop-down list, you can use the AIR Matching (Artistic Intent Rendering) or bypass OOTF settings to achieve a consistent look between external-monitor previews and rendered clips.

Using AIR Matching to monitor using the S-Log3 (Live HDR) EOTF

Sony BVM-X300 version 2.0 monitor settings:

- Color Space: ITU-R BT.2020
- EOTF: S-Log3 (Live HDR)
- Transfer Matrix: ITU-R BT.2020
- In the Catalyst Browse Options menu, choose Rec.2020/S-Log3 from the External monitor color space drop-down list.

Content mastered using these settings and rendered to HLG or PQ with AIR Matching should have the same look on HLG or PQ monitors or televisions.

Using bypass OOTF to monitor using the S-Log3 (HDR) EOTF

Sony BVM-X300 version 2.0 monitor settings:

- Color Space: ITU-R BT.2020
- EOTF: S-Log3 (HDR)
- Transfer Matrix: ITU-R BT.2020
- In the Catalyst Browse Options menu, choose Rec.2020/S-Log3 from the External monitor color space drop-down list.

Content mastered using these settings and rendered to HLG or PQ with bypass OOTF should have the same look on HLG or PQ monitors or televisions.

Converting HDR media to SDR color spaces

When converting HDR media to standard dynamic range color spaces, use the following settings to preserve your Rec.2020/S-Log3 grading (the dynamic range of the HDR color space will be clamped to the BT.709 gamma curve):

- In Options, set the Working color space to Rec.2020/S-Log3 (HDR).
- In Options, enable the SDR gain switch and adjust the Gain slider to choose the gain that will be applied when exporting to an SDR format or displaying on an



SDR display.

- In Options, set the Preview color space to Rec.709 or Rec.2020.

When converting HDR media to standard dynamic range color spaces, use the following settings to preserve more of the dynamic range of the original HDR media:

- In Options, set the Working color space to Rec.709.
- In the Inspector, set the Convert to color space to 709(800), HG8009G33, or HG8009G40.

For more information, see ["Applying color correction" on page 107](#).

SR Live for HDR settings

When you choose Rec.2020/S-Log3 from the Working color space drop-down list, you can enable the SDR gain switch to convert between standard- and high-dynamic-range content:

SDR gain

When the switch is enabled, you can drag the Gain slider to choose the gain that is applied when reading SDR content or when exporting to an SDR format or displaying on an SDR display.

For example, if you set the slider to -6.0 dB, a linear gain of +6.0 dB (2.0x) is applied when reading SDR content, and a linear gain of -6.0 dB (0.5x) is applied when exporting to an SDR format or displaying on an SDR display.

Choosing an external video monitor device and resolution

Choose a setting from the External monitor device drop-down list to display your video preview on an external monitor via a Blackmagic Design device:

- DeckLink 4K Extreme 12G, 4K Pro, 4K Extreme, Studio 4K, SDI 4K, HD Extreme, Extreme 3D, and Mini Monitor.
- Intensity Shuttle, Pro 4K, and Pro.
- UltraStudio 4K Extreme, 4K, Pro, SDI, Express, and Mini Monitor.

Choose a setting from the Monitor resolution drop-down list to choose the display resolution for your monitor.

Keyboard shortcuts

Shortcut keys can help streamline your work with Catalyst Browse software. The available shortcut keys are arranged in tables according to function.

Global shortcuts

The following keyboard shortcuts are available when the Video or Media Browser pane has focus.

Command	Windows Shortcut	macOS Shortcut
Enter full-screen preview/playback	F11 or Ctrl+F	⌘ -F or Control-⌘ -F
Exit full-screen preview/playback	Esc, F11, or Ctrl+F	Esc, ⌘ -F, or Control-⌘ -F
Switch between Media Browser/View workspaces	Alt+W	Option-W
Show/hide the Inspector pane	Alt+1	Option-1
Show/hide the Copy pane	Alt+2	Option-2
Show/hide the Export pane	Alt+3	Option-3
Show/hide the Share pane	Alt+4	Option-4
Show/hide the secondary window	Alt+V	Option-V
Open application help	F1	Fn-F1 (F1 if the Use all F1, F2, etc. keys as standard function keys setting is selected)

Media Browser

The following keyboard shortcuts are available when the Media Browser pane has focus.

Command	Windows Shortcut	macOS Shortcut
Navigate files/folders	Up, Down, Left, or Right Arrow	Up, Down, Left, or Right Arrow
Open/close folder in tree view	Right/Left Arrow	Right/Left Arrow
Select all files	Ctrl+A	⌘ -A
Deselect all files	Ctrl+D	⌘ -D
Delete selected files	Delete	Delete or fn+Delete
Load file and start/pause playback	Spacebar	Spacebar
Load file into Video pane	Enter or Ctrl+Down Arrow	Return or ⌘ - Down Arrow
Open selected folder		
Navigate up one level	Backspace	⌘ -Up Arrow
Go to start/end of list	Home	Home
	End	End
Move selection up/down one page	Page Up	Page Up
	Page Down	Page Down

Editing

The following keyboard shortcuts are available when the View pane has focus.

Command	Windows Shortcut	macOS Shortcut
Switch Logging/Clip List/Clip/Adjust Colors	` ~	` ~
Save a snapshot of the current frame to a file.	Shift+S	Shift-S
Reset mark in and mark out points to the beginning and end of the clip.	Shift+R	Shift-R
Switch between Before/After/Split/2 Up video preview in	1/2/3/4	1/2/3/4

Command	Windows Shortcut	macOS Shortcut
Adjust Color mode.		
Show/hide the Media Browser in View mode	Ctrl+B	⌘ -B

Playback and preview

The following keyboard shortcuts are available when the Video pane has focus.

Command	Windows Shortcut	macOS Shortcut
Go to start	Ctrl+Home	⌘ -Home
	Ctrl+Up Arrow	⌘ -Up Arrow
		Fn- Left Arrow
Go to end	Ctrl+End	⌘ -End
	Ctrl+Down Arrow	⌘ -Down Arrow
	End	Fn- Right Arrow
Go to previous frame	Left Arrow	Left Arrow
Go to next frame	Right Arrow	Right Arrow
Go to previous clip	[[
Go to next clip]]
Start/pause playback	Spacebar	Spacebar
Shuttle playback	J/K/L	
		Press J or L once for 1x playback.
		Press J or L twice for 1.5x playback.
		Press J or L three times for 2x playback.
		Press J or L four times for 4x playback.
		Press K to pause playback.
	Press and hold K while pressing J or L to emulate a shuttle knob mode: press K+J to turn the knob to the left or K+L to turn the knob to the right.	
Toggle looped playback	Q	Q
	Ctrl+L	⌘ -L

Command	Windows Shortcut	macOS Shortcut
Set Mark In point	I	I
Set Mark Out point	O	O
Add shot mark (to supported file types)	E	E
Go to Mark In point	Shift+I Home	Shift-I Home
Go to Mark Out point	Shift+O End	Shift-O End
Save a snapshot of the current frame to a file.	Shift+S	Shift-S
Reset Mark In/Out points	Shift+R	Shift-R
Go to previous marker (including Mark In/Out)	Ctrl+Left Arrow	⌘ -Left Arrow
Go to next marker (including Mark In/Out)	Ctrl+Right Arrow	⌘ -Right Arrow
Copy current frame to clipboard	Ctrl+C	⌘ -C
Enter full-screen playback	F11 Ctrl+F	⌘ -F Control-⌘ -F
Show/hide the secondary window	Alt+V	Option-V
Zoom to fit	Ctrl+0	⌘ -0
Zoom to 100%	Ctrl+1	⌘ -1
Zoom in	Ctrl++	⌘ -+
Zoom out	Ctrl+-	⌘ --
Show/hide the Media Browser in View mode	Ctrl+B	⌘ -B

Gestures

Media Browser pane

Gesture	Result
Tap	Selects and loads a file.
Double-tap	Opens a file in the Video pane.
One-finger drag (touchscreen)	Scrolls the list vertically.
Two-finger drag (trackpad)	
One-finger flick (touchscreen)	Scrolls the list with inertia.
Two-finger flick (trackpad)	

Video pane

Gesture	Result
Double-tap	Toggles the zoom level between 100% and Fit.
One-finger drag (touchscreen)	Pans the image.
Two-finger drag (trackpad)	
One-finger flick (touchscreen)	Pans the image with inertia.
Two-finger flick (trackpad)	
Pinch	Zooms the image in and out.

- .
- .ccolor files 99, 111
- .cube files 97
- .smi files 69
- 1**
 - 1D LUT export 111
- 3**
 - 3D LUT export 111
- 5**
 - 50p half-step timecode 136
- 6**
 - 60p half-step timecode 136
- A**
 - add padding to clips 130
 - Add to Favorites 19
 - adding clips 71
 - adding shot marks 69
 - address/port (FTP) 119
 - AIR matching 109, 139
 - all frames playback 59
 - anamorphic stretch 64
 - ASC-CDL export 111
 - ASC-CDL files 98, 101
 - audio meters 63
 - auto cropping amount 78
 - Auto cropping amount 82
 - Automatically rotate thumbnails 136
 - AVCHD relay clips 75-76
- B**
 - breathing 81
 - breathing mode 81
 - browse remote server 19, 120
 - BVM-X300 110
 - bypass OOTF 109, 139
- C**
 - catalog export 74
 - channel routing 64
 - Ci Workspace 133
 - CinemaScope overlay 65
 - clip settings 64
 - clip list from selection 70
 - clip lists 69
 - Clip rotation 64, 84, 136
 - Clips
 - rotation 64, 84, 136
 - color correction 87
 - exporting 111
 - loading 99
 - color curves 98
 - color presets 99, 111
 - color sliders 98
 - color space 93
 - color temperature slider 94
 - color wheels 91
 - combining relay clips 75
 - continuous playback 56, 61
 - Converting HDR to SDR color spaces 109, 139
 - Copy all related media 132
 - Copy clips only 132
 - copy clips to a device 131
 - copy files 22
 - Copy only between mark points 132
 - copy snapshot to clipboard 62

- copy to FTP 133
- correct lens breathing 81
- creating clip lists 70
- cropping ratio 80
- CSV export 74
- curves 98

D

- default look profile 97
- delete files 23
- deleting shot marks 69
- desqueeze 64, 130
- device copy 133
- disconnect FTP 119
- discontinuous timecode 56, 61, 67
- display CinemaScope overlay 65
- Display color space (external monitor) 137
- Display color space (video preview) 137
- display mode 20-21
- display secondary window 136

E

- Edit remote server 120
- editing essence marks 69
- editing summary metadata 68
- EDL
 - importing 73
 - linking clips 73
 - replacing clips 73
 - unlinking clips 73
- essence marks 62, 67
- exporting clips 119
- exposure slider 94
- external monitor color space 137
- external monitor device 140
- external monitor resolution 140

F

- fast copy 133

- Favorite Folders 19
- file formats 23, 52
- file information 67
- filter by date created 21
- filter by flag 21
- filter by format 21
- filter by type 21
- filtering clips 21
- finalizing Professional Disc volumes 23
- finding media 17
- fit 58
- flash bands 83, 130
- flip horizontal 64
- flip vertical 64
- folder (FTP) 119
- formatting Professional Disc volumes 23
- formatting SxS 23
- FTP 19, 119
- FTP copy 133
- FTP devices
 - browsing 120
 - connecting 119
 - disconnecting 119
 - reconnecting 119
 - removing 120
 - SxS media 121
 - USB storage 121
- FTP protocol 119
- FTP server settings 120
- FTPS protocol 119
- full-frame-rate playback 59
- full-screen preview 59

G

- gestures 147
- Go to End 60
- Go to Start 60
- GPS information 67
- GPU acceleration 135
- grade in 137
- grading color space 93, 137

Graph scale 78-79
graticule 90
gyroscope 76

H

half-step timecode display 136
histogram monitor 89

I

importing a LUT 96
importing an EDL 73
interoperability 135

J

JKL shuttle 60

K

Kelvin temperature 94
keyboard shortcuts 141

L

lens breathing 81
linking clips in an EDL 73
list view 20
logging 61
logging metadata 68
look profile 96-97
look, default 97
loop playback 61
Loop Playback 60
LTC 56, 61, 67
LUT export 111
LUT import 96

M

magnifying glass 58

Make default look profile 97
mark in 61, 68
mark out 61, 68
Mask options 65
Masking ratio 65
master volume 63
maximum cropping amount 78, 82
Media Browser pane 17
metadata 67
metadata for proxy clips 67, 132
metadata, stabilization 76
meters 63
minimum cropping amount 78, 82
minimum stabilized crop resolution 79, 82
monitor color space 137
monitor resolution 140
multicam,synchronizing audio 76
multicamera clips, synchronizing 76

N

navigating the timeline 60
new clip list from selection 70
new empty clip list 70
Next Frame 60
numbering 127

O

open clip list 70
OpenCL/OpenGL interoperability 135
options 135
ordering clips 71

P

password 119
PD-EDL clip lists 69, 73
PDF export 74
preserve source UMID 133
Play 60
play all frames 59

- play in real time 59
- playing media 55
- prefix 127
- Preview color space 137
- preview proxy clips 136
- Previous Frame 60
- Professional Disc format 23
- protocol 119
- proxy metadata 67, 132
- proxy preview 136
- PZW-4000 121

R

- real time playback 59
- Rec.2020 137
- Rec.709 137
- reconnect FTP 119
- relay clips, combining 75
- remote server 19
- Remove remote server 120
- removing clips 72
- Rename files 127
- renaming clips 22
- reordering clips 71
- repairing flash bands 83, 130
- replace source media 73
- Reset mark in/out points 62
- reset options 135
- Reset to default look profile 97
- Rotate preview (degrees) 64
- rotated clips 64, 84, 136

S

- safe areas 64
- saturation slider 98
- save snapshot 63
- save snapshots to 136
- Scale graph to clip 78-79
- scrub control 60
- searching for clips 21

- secondary window 136
- select files 22
- sequential playback 56
- server name (FTP) 119
- sharing files with Ci Workspace 133
- shortcuts 141
- shot mark 69
- Show in Explorer 23
- Show in Finder 23
- show safe areas 64
- show secondary window 136
- shuttle control 60
- sliders 94
- snapshot image format 137
- Sony BVM-X300 110
- source color space 93
- source UMID 133
- split-screen preview 57, 90
- stabilization mode 77
- stabilize clips 76
- stabilized crop resolution 78-80, 82
- starting frame index 129
- suffix 127
- supported formats 23, 52
- SxS format 23
- SxS media 121
- synchronizing multicamera clips 76

T

- Tangent element 101
- temperature slider 94
- thumbnail frames 136
- thumbnail view 20
- timecode break 56, 61, 67
- tint slider 94
- tone curve 98
- touchscreen navigation 147
- trackpad navigation 147
- transcode clips before upload 134
- transcoding clips 126
- transferring clips via FTP 119

transport controls 60

U

UMID (Unique Material Identifier) 133
unlinking clips in an EDL 73
upload original clips 134
uploading to Ci 23
uploading to Ci Workspace 133
use anamorphic setting 64, 130
Use fast device-to-device copy 133
use flip and desqueeze settings 64
Use flip, rotate, and desqueeze settings 130
use mark in/out points 130
user name 119

V

vectorscope monitor 89
Video pane 55
video preview 90
video processing device 135
VTR-style playback 56

W

waveform monitor 88
wheels 91
working color space 137

X

XDCAM EDL 69
XDCAM Professional Disc format 23